
Product Information

Order number: LG56279

Röhre Performance PRO Mediatube HI-CRI 1200 18-950-2000LM





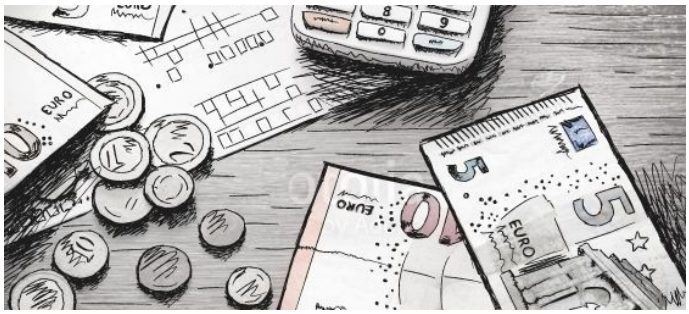



Product information "Röhre Performance PRO Mediatube HI-CRI 1200 18-950-2000LM"

LED Tube

Performance PRO HI-CRI Mediatube
Very efficient LED tube to replace traditional flourescent tubes. These Litegear® Performance Line LED tubes are manufactured to the latest European standards and are TüV approved. For safety reasons they have power input only from one side and a fuse bridgestarter included that has to replace the old starter. These LED tubes have a very high brightness and can safe up to 70% of energy compared to the traditional tubes. Very easy to exchange within seconds. Due to their long lifespan, return on investment will be reached in short time. The Litegear® Performance Line stands for a greener future and highest security standards. All tubes are available in different color temperatures.

Features:

- smooth light spread
- Mercury free
- CO^2 reduction
- easy and quick installation
- long lifetime
- Quick start - no start up time

Scope:

- general illumination
- public buildings
- Lobby, Corridor illumination
- Parking places

Technical Details:

Luminous Flux	2000 lm
Light Yield:	111 lm/W
Light Temperature:	5000 K
Color Rendering Index (CRI)	≥90 Ra
Color Consistency (SDCM):	6
Power Consumption:	18 W
Power Factor (PF):	0.94
Operating Hours:	>50.000 h L70/B50
Switching Cycles:	>100.000
Ignition Time:	<1 s
Ambient Temperature (TA):	-20°C - 50°C
Dimensions	26x1200 mm
Net Weight:	353 g
Warranty	3 years

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de