Technical Data Sheet

Order number: LG51120

LITEGEAR
LED Lighting Solutions

Tridonic TALEXXconverter LCA 45W Dali, Push-Dim

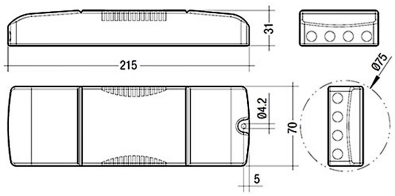

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI,Push-Dim
Input Current:	AC 198 - 264V, 132-224mA, 50/60Hz, DC 176 - 2
Power Consumption:	51 W
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.98
Input Driver:	terminal
Output of Driver:	DC 25-50V, 500-1400mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Compatible with Emergency Current:	✓
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-25°C - 50°C

Dimensions:	215x70x31 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Through-wiring
Net Weight:	231 g
Type of Packaging:	box
Weight incl. Packaging:	0.281 kg
Content Master Package:	10
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	100.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,SELV
Barcode:	9006210523781
NOTWENDIGES ZUBEHÖR: Tridonic I-Select 2 Plug	
Ausgangsstromanpassung über Widerstandsplug	
18-50W Ausgangsleistung (einstellbar)	

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de