


Rectangula UP/Down 67-830-4500LM extern schaltbar

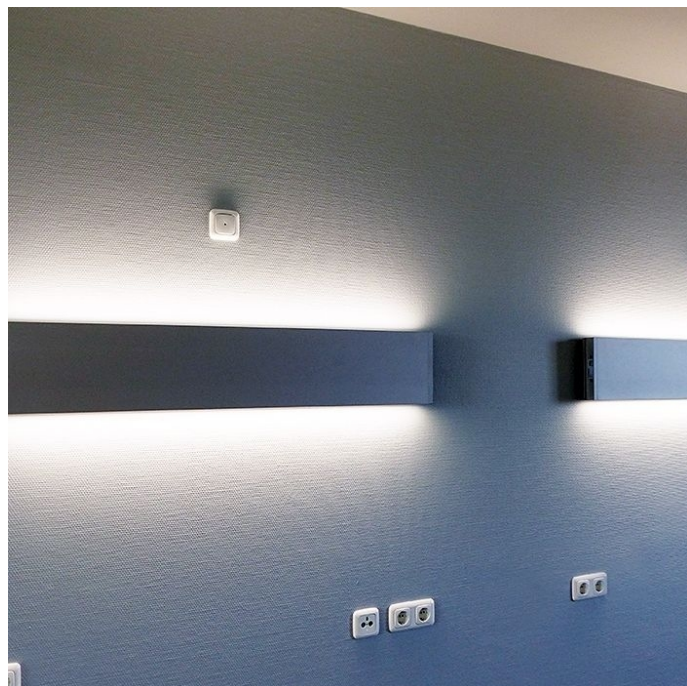

Product information "Rectangula UP/Down 67-830-4500LM extern schaltbar"


LED wall light

Rectangula Up/Down is a timeless LED wall light with silver housing and direct and indirect light output. Due to high efficient and energy saving LED boards the user can save up to 55% of electricity based on fluorescent versions. The LED boards are covered with frosted covers to reduce the glare and protect the chips from dust. The integrated quality LED driver is based on a long lifespan. That helps to reduce maintenance costs for the user. The light beams are focused, so Rectangula can be used in hospitals, health care, medical rooms, offices and corridors.

Applications:

- Hospital
- Patient's room
- Care home
- Consulting rooms

Management



Technical Details:

Luminous Flux	4500 lm
Light Yield:	66 lm/W
Light Temperature:	2900 K
Color Rendering Index (CRI)	≥83 Ra
Color Consistency (SDCM):	3
Power Consumption:	68 W
Power Factor (PF):	0.9
Operating Hours:	>50.000 h L80/B20
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	aluminum
Housing Color	silver
Coating:	lacquered
Dimensions	1170x50x145 mm
Net Weight:	5750 g
Warranty	3 years

Information and Downloads:

