

Product Information

Order number: LG56196

Röhre Performance PRO MKII 1200 18-860-2100LM



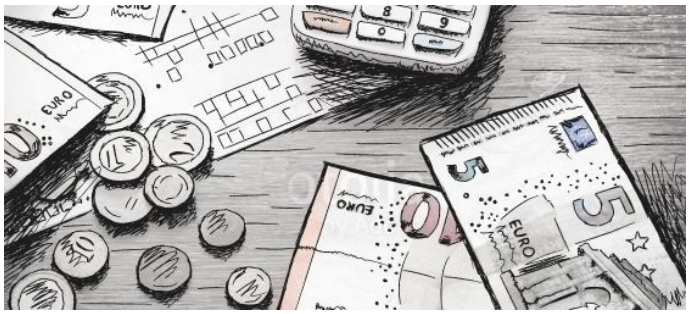



Product information "Röhre Performance PRO MKII 1200 18-860-2100LM"

LED Tube

The next generation of our successfull Litegear® Performance LED tube Serie: the Performance PRO MKII line. More lightoutput, better efficency, lower price, longer lifespan, slim and compatible design like original flouresvent tube. Best performance ever! You can save more energy or just get better brightness in your applications. Very easy to replace traditional flouresvent tubes and save up to 65% of energy. Just exchange the starter to a included dummy starter with fuse and replace the tubes. Done with seconds. benefit from flicker free instant light with low glare and good color rendering. With the rotateable endcaps it is suitable for any position in the G13 socket. Available in different CCT colors. LED is good for our ewnvironment: free of murcury and other toxic material. Change for a green future with LED tubes from Litegear´s Performance pro series.

Features:

- smooth light distribution
- Mercury free
- CO^2 reduction
- easy and quick installation
- long lifetime
- instant start - no start up time

Scope:

- general illumination: supermarket and office
- public buildings such as schools or stations
- Lobby, Corridor illumination
- Parking places, logistics and industry

Technical Details:

Luminous Flux	2100 lm
Light Yield:	117 lm/W
Light Temperature:	6000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	3
Power Consumption:	18 W
Power Factor (PF):	0.95
Operating Hours:	>50.000 h L70/B20
Switching Cycles:	>100.000
Ignition Time:	<1 s
Ambient Temperature (TA):	-20°C - 50°C
Dimensions	26x1200 mm
Net Weight:	345 g
Warranty	3 years

Information and Downloads: