


Tridonic TALEXXconverter LCA one4all Ip PRE

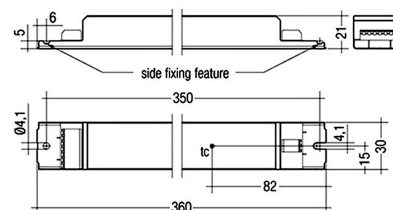

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI, Push-Dim
LED-Chip:	COB
Input Current:	AC 198 - 264V, 50/60Hz, DC 176 - 280V
Power Consumption:	57 W
Power Factor (PF):	>0.98
Input Driver:	terminal
Output of Driver:	DC 48-50V
CC/CV:	CC
Output Current Adjustable:	✓
Electrical Protection Class:	I
Compatible with Emergency Current:	✓
Ambient Temperature (TA):	-25°C - 60°C

Dimensions:	358x30x21 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	metal
Net Weight:	207 g
Type of Packaging:	box
Weight incl. Packaging:	0.256 kg
Content Master Package:	10
Warranty	5 years
Operating Hours:	100.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE, ENEC
Barcode:	9006210522661
Connection:	Klemme

Information and Downloads:

