




BEG Aufputz Präsenzmelder PD4-M-DALI/DSI-K-AP

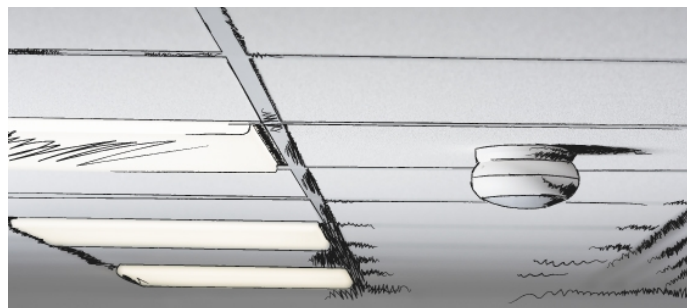

Product information "BEG Aufputz Präsenzmelder PD4-M-DALI/DSI-K-AP"

Product Information

- Occupancy detector designed for corridors, daylight-dependent lighting control
- DALI / DSI interface for control of digital dimmable electronic ballasts as a group
- Switching between DALI and DSI programming possible with DIP switch and remote control
- Version as Master device
- Extension of the detection area with slave devices possible
- Manual switching and dimming via push button possible
- Additional functions can be set up using the optional remote control.
- Factory settings 10 min and 500 lux
- There are markings for adjusting the detector
- Orientation light function
- Typical application: monitoring of long corridors

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

FC= Ø 97 x 103 mm

SM= Ø 98 x 63 mm

Power consumption:

approx. 1 W

Detection area:

vertical 360°

Range:

max. Ø 40 m across

max. Ø 20 m towards

Monitored area (tangential movement):

250 m² / 2.5 m Mounting height

Mounting height

min./max./recommended:

2.4 m / 2.6 m / 2.5 m

Degree / class of

protection:

FC= IP20 / Class II

SM= IP20 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Änderungen vorbehalten

Technical details are subject to change

(c) 2017

EN 60929-1

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de

Technical Details:

Dimensions	98x63 mm
Net Weight:	246 g

Information and Downloads:



up to 50 DALI / DSI-EB

Follow-up time:

1 min - 30 min

Orientation light:

10 - 30 % / OFF / 5 min - 60 min / ∞

Brightness set value:

10 - 2000 Lux

Mixed light measuring