


BEG Bewegungsmelder PD3N-1C-DE-Micro

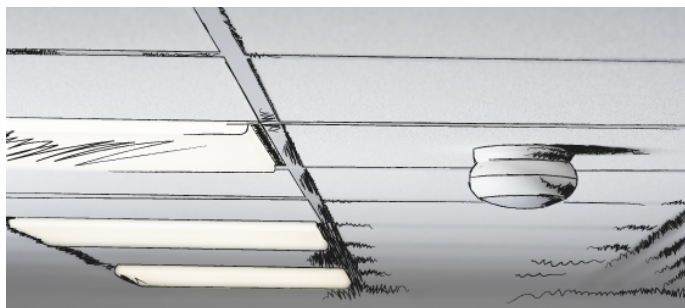

Product information "BEG Bewegungsmelder PD3N-1C-DE-Micro"

Part No. 92184

Product Information

- Remote control-capable ceiling motion detector with integrated acoustic sensor
- One channel for light switching
- Special optical system for detection of even the smallest movements
- Manual switching via push-button possible
- Additional functions can be set up using the optional remote control.
- Typical applications: monitoring of smaller areas like stairwells, private garages, galleries, wash rooms

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

FC= Ø 83 x 81 mm

SM= Ø 106 x 53 mm

Power consumption:

approx. 0.5 W

Detection area:

vertical 360°

Range:

max. Ø 10 m across

max. Ø 6 m towards

max. Ø 4 m smaller movements

Monitored area (tangential movement):

79 m² / 2.5 m Mounting height

Mounting height min./max./recommended:

Degree / class of protection:

FC= IP23 / Class II

SM= IP44 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Polycarbonate, UV-resistant

Channel 1 (lighting control)

Switching power:

2300 W, cos ϕ = 11150 VA, cos ϕ = 0.5

Änderungen vorbehalten

Technical details are subject to change

(c) 2017

max. inrush current (200 µs) = 600 A

Litegear GmbH


An Fürthenrode 45

52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0

Fax: +49 (0)2451 48453-13

www.litegear.de



Technical Details:

Dimensions	83x81 mm
Cut-Out Dimensions	66 mm
Net Weight:	235 g

Information and Downloads:



Type of contact:

1x μ -contact, NO contact with tungsten pre-make contact

Follow-up time:

30 sec - 30 min, Pulse

Switch-on threshold:

10 - 2000 Lux