




Aufputz Präsenzmelder PD2-M-1C-AP

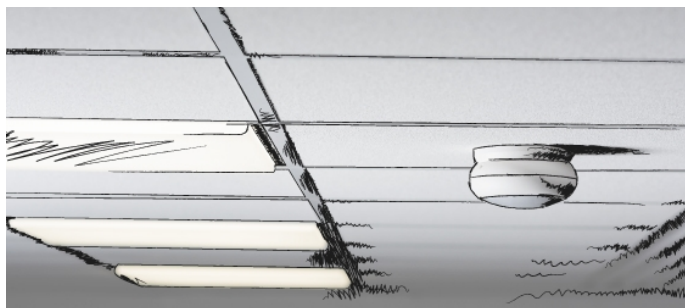

Product information "Aufputz Präsenzmelder PD2-M-1C-AP"

IR Occupancy detector max. 10m

Product Information

- Occupancy detector with one potential-free dry contact
- Version as Master device
- One channel for light switching
- Extension of the detection area with slave devices possible
- Manual switching via push-button possible
- Additional functions can be set up using the optional remote control.
- Factory settings 10 min and 500 lux
- Typical applications:

Offices, conference rooms, schools, nursery schools, hospitals

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

SM= Ø 98 x 47 mm

FM= Ø 98 x 65 mm

FC= Ø 80 x 85 mm

Power consumption:

approx. 0.4 W

Detection area:

vertical 360°

Range:

max. Ø 10 m across

max. Ø 6 m towards

max. Ø 4 m seated

Monitored area (tangential movement):

79 m² / 2.5 m Mounting height

Mounting height min./max./recommended:

2 m / 5 m / 2.5 m

Degree / class of protection:

SM= IP20 / Class II

FM= IP20 / Class II

FC= IP20 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Polycarbonate, UV-resistant

Technical Details:

Dimensions	98x50 mm
Net Weight:	216 g

Information and Downloads:



300 W LED

max. inrush current I_p (20 ms) = 165 A

max. inrush current I_p (200 μ s) = 800 A

Type of contact:

1x μ -contact, dry NO contact with tungsten pre-make contact

Follow-up time:

15 sec - 30 min, Pulse

Switch-on threshold:

10 - 2000 Lux

Mixed light measuring