




BEG Aufputz Präsenzmelder PD2-M-DALI/DSI-AP

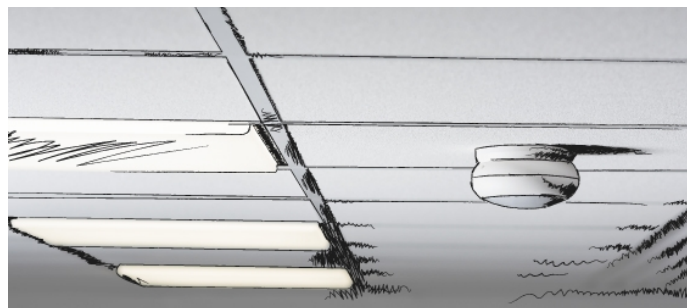

Product information "BEG Aufputz Präsenzmelder PD2-M-DALI/DSI-AP"

Part No. 92280

Product Information

- Occupancy detector for daylight-dependent lighting control
- DALI / DSI interface for control of digital dimmable electronic ballasts as a group
- Manual switching and dimming via push button possible
- Switching between DALI and DSI programming possible with DIP switch and remote control
- Version as Master device
- Extension of the detection area with slave devices possible
- Additional functions can be set up using the optional remote control.
- Orientation light function
- Factory settings 10 min and 500 lux
- Typical applications:

Offices, conference rooms, schools, nursery schools, hospitals

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

FC= Ø 80 x 85 mm

SM= Ø 98 x 47 mm

Power consumption:

approx. 1 W

Detection area:

vertical 360°

Range:

max. Ø 10 m across

max. Ø 6 m towards

max. Ø 4 m seated

Monitored area (tangential movement):

79 m² / 2.5 m Mounting height

Mounting height min./max./recommended:

2 m / 5 m / 2.5 m

Degree / class of protection:

FC= IP20 / Class II

SM= IP20 / Class II

Ambient temperature:

-25 °C to +50 °C

Technical Details:

Dimensions	98x50 mm
Net Weight:	210 g

Information and Downloads:



DALI output:

up to 50 DALI / DSI-EB

Follow-up time:

1 min - 30 min

Orientation light:

10 - 30 % / OFF / 5 min - 60 min / ∞

Brightness set value:

10 - 2000 Lux

Mixed light measuring