




BEG Aufputz Präsenzmelder PD4-S-AP

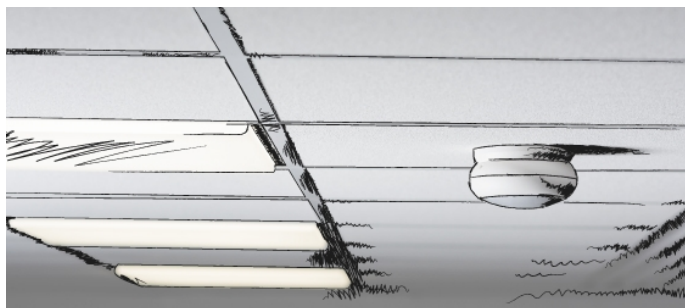

Product information "BEG Aufputz Präsenzmelder PD4-S-AP"

No. 92142

Product Information

- Slave device detector with extended detection area
- For extending the detection area of a Master device
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Compatible with all Master devices except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB, PD4-M-DAA4G, Indoor
- 140-L, PD2N-M-1C-LED
- Typical applications: monitoring of large areas like underground garages, gyms, warehouses, loading ramps, halls

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

SM= Ø 101 x 76 mm

FM= Ø 97 x 84 mm

FC= Ø 97 x 103 mm

Power consumption:

approx. 0.2 W

Detection area:

vertical 360°

Range:

max. Ø 24 m across

max. Ø 8 m towards

max. Ø 6.4 m seated

Monitored area

(tangential movement):

450 m² / 2.5 m Mounting height

Mounting height min./max./recommended:

Degree / class of

protection:

SM= IP54 / Class II

FM= IP20 / Class II

FC= IP20 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Polycarbonate, UV-resistant

Ausgangsspannung:

Änderungen vorbehalten

Technical details are subject to change

(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de

Technical Details:

Dimensions	97x84 mm
Net Weight:	315 g

Information and Downloads:



