



BEG LUXOMAT?net PD4-S-DAA4G-AP

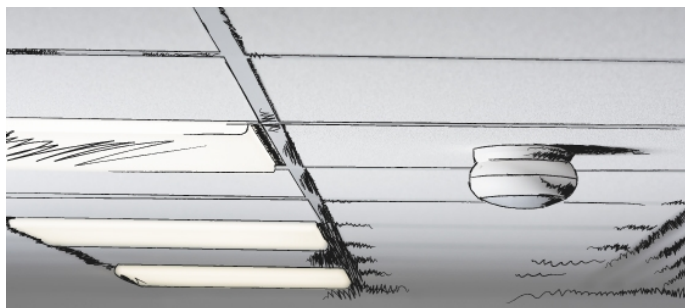

Product information "BEG LUXOMAT?net PD4-S-DAA4G-AP"

Part No. 92759

Product Information

- Slave device particularly for DALI compact system PD4-M-DAA4G
- For extension of the detection area of a master device PD4-M-DAA4G
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Automatic test mode via master device
- Plug & Play - no parameterisation required
- Easy to mount
- False ceiling or surface mount version available
- Typical applications: conference rooms, offices, schools, universities

Technical Data

Voltage:

22 V DC via DALI Bus

Dimensions:

FC= Ø 98 x 96 mm

SM= Ø 103 x 76 mm

Detection area:

vertical 360°

Range:

max. Ø 24 m across

max. Ø 8 m towards

max. Ø 6.4 m seated

Monitored area (tangential movement):

450 m² / 2.5 m Mounting height

Degree / class of protection:

FC= IP20 / Class II

SM= IP54 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Polycarbonate, UV-resistant up to 4 slave devices in combination with one PD4-M-DAA4G

Ausgangsspannung:

22 V DC

Pulse interval:

30 sec (in test mode 2 sec during 3 min)

Technical Details:

Dimensions	103x76 mm
Net Weight:	267 g

Information and Downloads:

