
Technical Data Sheet

Order number: LG51321

Lifud GIF030YA(H)0650H





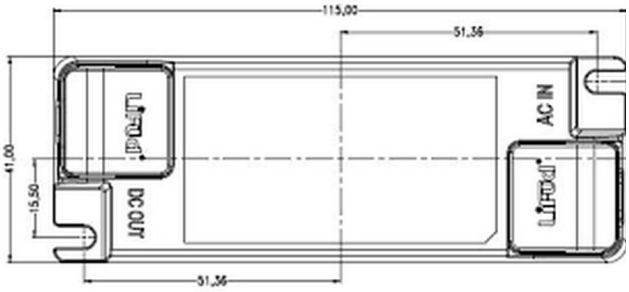

Technical Details:

Method of Dimming:	1-10V,DALI,PWM,Push-Dim
Input Current:	AC 220 - 240V, 50/60Hz
Power Consumption:	26 W
Power Factor (PF):	>0.94
Input Driver:	terminal
Output of Driver:	DC 33 - 40V, 650mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-30°C - 50°C

Dimensions:	115x41x28 mm
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	100 g
Type of Packaging:	box
Content Master Package:	84
Dimensions of Master Package:	390x290x210 mm
Weight Master Package:	8,72 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,TÜV,SELV
Barcode:	4250557816692
ideal für Panels und Downlights	

Information and Downloads: