


SOLVELA 40-740-4800LM IP65 IR remote

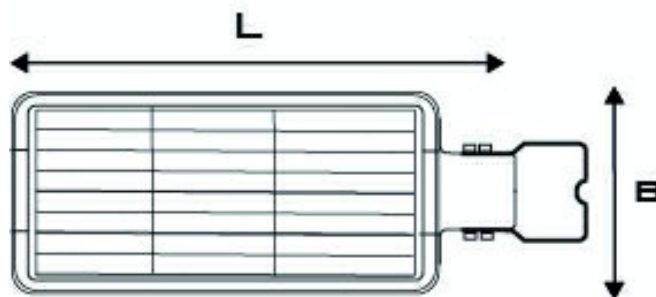

Technical Details:

Luminous Flux:	4800 lm
LED Output:	37 W
Light Yield:	120 lm/W
Light Temperature:	4000 K
Light Color:	neutralwhite
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<6
Beam Angle:	140x70 °
Light Emission:	downward
LED-Chip:	SMD 2835
Number of LED:	90
Ignition Time:	<1 s
Input Current:	DC 11,1V, 10AhmA
Power Consumption:	40 W
CC/CV:	CV
Input Lamp:	terminal
Switching Cycles:	>50.000
Ambient Temperature (TA):	-10°C - 40°C
Storage Temperature:	-10°C - 40°C

Dimensions:	621,6x289,7x73,6 mm
Montageart:	surface mounted
IP Class:	65
Housing Color	black
Housing Material:	ABS+PC, Alu Anti UV
Special Feature of Housing:	Sensor/Solarpanel
Cover:	Lens
Net Weight:	4980 g
Type of Packaging:	box
Dimensions of Packaging:	730x330x100
Weight incl. Packaging:	5.32 kg
Content Master Package:	4
Dimensions of Master Package:	750x395x350 mm
Weight Master Package:	22,5 kg
Product Line:	Essential Line
Warranty	2 years
Operating Hours:	35.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405413100
Certifications	CE
Barcode:	4250557818306
Mastaufnahme Ø: 50 mm Solarpanel: (19W/15V)	
adjustable LED-Module, charging time 6h/day	
integrierter Bewegungssensor mit Dimmung/Standby	
integrated motion sensor 120° <12m	
LIFEPO4 battery: 32650/12,8V/6000mAh replaceable	

Information and Downloads:

