


# Tridonic TALEXXconverter LCA 100W 1100-2100mA one4all SR PRE

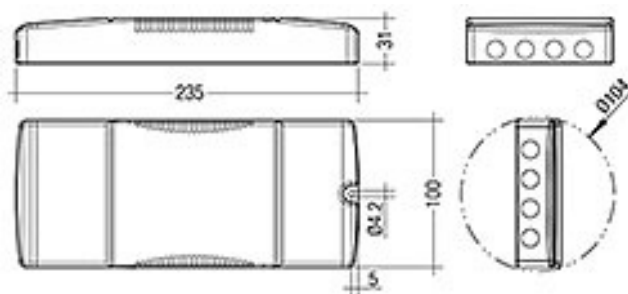

## Technical Details:

Dimmable:	✓
Method of Dimming:	DALI, Push-Dim
Input Current:	AC 198 - 264V, 241-293mA, 50/60Hz, DC 176 - 2
Power Consumption:	100 W
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.98
Input Driver:	terminal
Output of Driver:	DC 20-54V, 1100-2100mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Compatible with Emergency Current:	✓
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-25°C - 50°C
Storage Temperature:	-40°C - 60°C

Dimensions:	235x100x31 mm
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Through-wiring
Type of Packaging:	box
Content Master Package:	10
Warranty	5 years
Operating Hours:	100.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE, ENEC, SELV
Ausgangsstromanpassung über Widerstandsplug	

Information and Downloads:

