


# TM Safety ONTEC S M5 305 M DATA2 W, 576lm

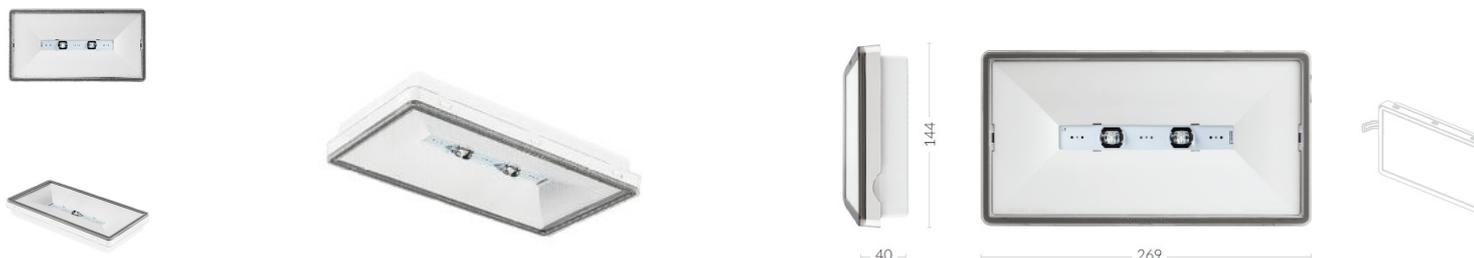

## Technical Details:

Luminous Flux:	576 lm
LED Output:	68 W
Light Yield:	85 lm/W
Light Temperature:	5700 K
Light Color:	neutralwhite
Color Rendering Index:	≥70 Ra
Color Consistency (SDCM):	<6
Beam Angle:	120 °
Light Emission:	downward
LED-Chip:	High-Power
Ignition Time:	<1 s
Input Current:	AC 210-250V, 50/60Hz
Power Consumption:	7 W
Contains Driver:	✓
Input Driver:	terminal
Input Lamp:	Terminal
Electrical Protection Class:	II
Ambient Temperature (TA):	0°C - 40°C
Storage Temperature:	-10°C - 50°C

Mounting:	ceiling,wall
Montageart:	recessed
IP Class:	65
IK Code:	08
Housing Color	white
Housing Material:	PC
Cover:	clear
Luminaire Type:	Fluchtwegleuchtung
Testing Facility:	programmierter Selbststest
Battery Warranty:	2
Discharge Duration:	≥3 h
Battery Type:	LiFePo4
Battery Current:	3000 mA
Battery Charge Duration:	12 h
Initial Charge Duration:	24 h
Charging Power Consumption:	6.8 W
Battery Cell Quantity	1
Luminous Flux in Battery Mode:	576 lm
Standards for emergency luminaires:	DIN EN 60598-2-22, Anforderung nach DIN EN 50172
Certified By:	ENEC
Type of Packaging:	box
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	50.000 h
Disposal Obligation:	✓
Certifications	CE,ENEC
wetterfestes Gehäuse	

Information and Downloads:



