Technical Data Sheet


Order number: LG10434.1

Axea Eco 35-830-3800lm







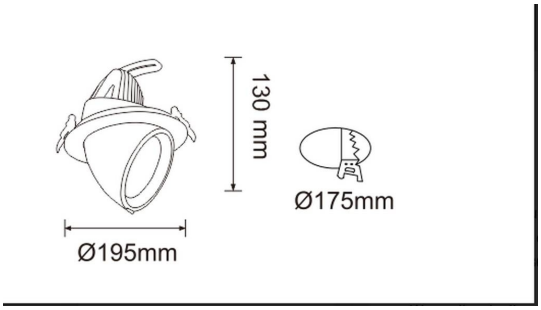

Technical Details:

Luminous Flux:	3800 lm
LED Output:	33 W
Light Yield:	112 lm/W
Light Temperature:	3000 K
Light Color:	warmwhite
Color Rendering Index:	≥83 Ra
Beam Angle:	36 °
Swappable Reflector:	✓
Light Emission:	downward
LED-Chip Manufacturer:	Citizen
LED-Chip:	COB
Number of LED:	1
Ignition Time:	<1 s
Input Current:	AC 220 - 240V, 50/60Hz
Power Consumption:	34 W
Contains Driver:	✓
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 26 - 45V, 800mA
CC/CV:	CC
Input Lamp:	plug connector
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 40°C
Storage Temperature:	-20°C - 55°C

Dimensions:	189x160 mm
Installation Depth:	158 mm
Cut-Out Dimensions:	170-180 mm
Mounting:	Decke
Montageart:	recessed
Pivot Range pan:	350 °
Pivot Range tilt:	60 °
IP Class:	20
Housing Color	white
Housing Material:	aluminum
Coating:	lacquered
Net Weight:	1096 g
Type of Packaging:	box
Dimensions of Packaging:	190x175x190
Weight incl. Packaging:	1.412 kg
Content Master Package:	12
Dimensions of Master Package:	405x405x547 mm
Weight Master Package:	16,060 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h L70/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE
Barcode:	4250557819327

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de

