


# Xona Line 1280 32-840-4000LM SENSOR EM3-ST

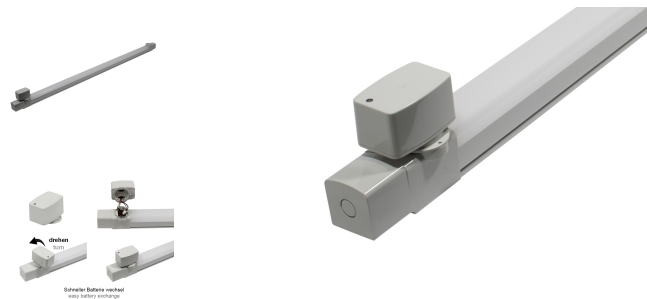

## Product information "Xona Line 1280 32-840-4000LM SENSOR EM3-ST"

### Weatherproof LED luminaire

The Litegear® Xona-Line is a weatherproof LED luminaire with a high protection class IP66. Xona-Line can be installed on ceilings or on walls with metal clips. With an optional rope set, the triproof luminaire can also be suspended. The housing is made of impact-resistant polycarbonate IK09 with an opal optical diffuser. The luminaire series is predestined for use in parking garages, warehouses, coldstorage, corridors or outdoors under canopies. The Xona-Line series includes numerous variants from 128 to 165cm in length and different powerclasses from 31 to 56W, which are optionally equipped with motion detectors or/and emergency battery packs for emergency lighting. The version with integrated sensor makes a simple master / slave operation possible. Thus, luminaires of this series can be combined with and without sensor in a group. A three to four-core cable is sufficient for communication. Also, 2 sensor lights can function simultaneously in one group and the whole group turns on when motion is detected. When absent, the group turns off or lights up at a reduced power of around 12% light level. With sufficient basic brightness due to incident daylight, the luminaires remain permanently off. Optional battery packs and emergency driver ensure safe escape lighting in the event of a power failure. High system efficiency of 130 Lumen/Watt guarantees a fast amortization time and huge energy saving. Easy installation due to internelectrical terminals and a easy modular design makes it a versatile lighting system. As a result of the long service life of 50,000 hours L80, there are virtually no costs for maintenance and servicing, which guarantees reliable operational safety.

Suitable for use in HACCP, IFS, and/or BRC Global Standard Food certified companies.

Version with internal 4 wire loop!

## Technical Details:

<b>Luminous Flux</b>	4000 lm
<b>Light Yield:</b>	119 lm/W
<b>Light Temperature:</b>	4000 K
<b>Color Rendering Index (CRI)</b>	≥80 Ra
<b>Color Consistency (SDCM):</b>	3
<b>Power Consumption:</b>	34 W
<b>Power Factor (PF):</b>	0.9
<b>Operating Hours:</b>	>50.000 h L80/B10
<b>Switching Cycles:</b>	>100.000
<b>Ignition Time:</b>	<0,5 s
<b>Ambient Temperature (TA):</b>	-10°C - 40°C
<b>Energy Efficiency Class:</b>	E
<b>Housing Material:</b>	Polycarbonat
<b>Housing Color</b>	hellgrey
<b>Dimensions</b>	1346x76x125 mm
<b>Warranty</b>	5 years

### Information and Downloads:

