


Order number: LG59086

# RENOVIA VARIO 157/36-40-827-860-4800LM BAP, RF-Remote CCT-Adjust + Dim

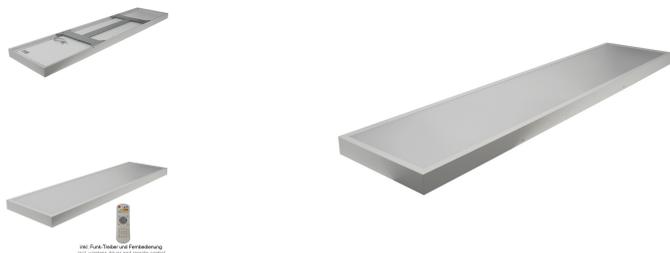

## Technical Details:

Luminous Flux:	4800 lm
LED Output:	40 W
Light Yield:	120 lm/W
Light Temperature:	2700-6000 K
Light Color:	Vario CCT
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<5
Beam Angle:	90 °
Unified Glare Rating (UGR):	<19
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	Funk
LED-Chip Manufacturer:	San'an
LED-Chip:	SMD 2835
Number of LED:	192
Ignition Time:	<0,5 s
Input Current:	AC 100-240V, 50/60Hz
Power Consumption:	40 W
Contains Driver:	✓
Driver Manufacturer:	TIGGI
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 12-42V, 1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	plug connector
Switching Cycles:	>50.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-30°C - 45°C

Dimensions:	1570x360x55 mm
Mounting:	ceiling,wall
Montageart:	surface mounted
IP Class:	20 (40 room side)
IK Code:	04
Housing Color	white
Housing Color (RAL Code):	similar 9016
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	zweiget. Anbaugehäuse
Cover:	Mikroprismatisch PMMA
Net Weight:	5960 g
Type of Packaging:	box
Weight incl. Packaging:	6.87 kg
Content Master Package:	4
Dimensions of Master Package:	1635x390x420 mm
Weight Master Package:	29,67 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	70.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE
Barcode:	4250557823331
Funkfernbedienbarer LED Treiber 40W Dim	
stufenlose Farbwahl: 2700-6000 Kelvin	
PMMA Lightguideplate, anti yellow	
Bildschirmarbeitsplatztauglich DIN EN12464-1	
Renovierungsleuchte Ersatz f.Rasterleuchten 2x58W	

Information and Downloads:

