


Lifud AAD040-1050-42 Dali-2

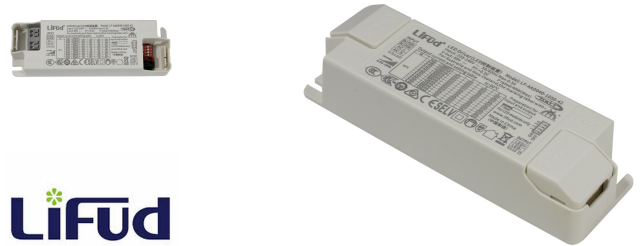

Technical Details:

Power Consumption:	40 W
Power Factor (PF):	0.95
Operating Hours:	>50.000 h TC<80°C
Switching Cycles:	>100.000
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	plastic
Housing Color	white
Dimensions	141x46,5x27,5 mm
Net Weight:	86 g
Warranty	5 years

Product information "Lifud AAD040-1050-42 Dali-2"

Dali 2 LED Power Supply

Constant current DC output LED driver with multi level selectable output current by dip switch. DALI- interface and push dim dimming. high efficiency up to 87%, with the fanless design for LED indoor lighting

Applications: LED office lighting, LED architectural lighting, LED panel and downlighting

Product Features:

- Constant Current mode output with multiple levels selectable by dip switch
- Plastic housing with class II design
- Built-in active PFC function
- Standby power consumption < 0.7W
- Functions: DALI interface, push dimming
- power select output: 550-1050mA 15-40W

Information and Downloads:

