


Varia RC Downlight Front Cover

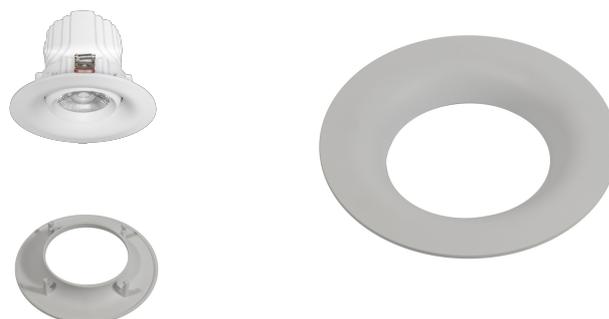

Product information "Varia RC Downlight Front Cover"

Frontcover

Bezel für modular Varia RC downlight, hard edge, white

General advantages of the Varia Series:

The Varia-RC series from the German manufacturer Litegear is probably the most innovative LED recessed spotlight in the world. The modular, service-friendly design allows the lens, the LED module and the ballast to be exchanged in seconds without tools and combined as desired. In this way, you can subsequently swap the light color for a different one or replace the lens with one with a more perfect beam angle. The user can even replace the external ballast without tools, for example with one with Dali dimming. The power adjustment of the LED power supplies using small DIP switches is also ingenious. The power of the LED downlight can be adjusted in 4 steps: 28W, 32W, 36W, 40W! This gives you either maximum performance or maximum power savings. Customers can choose between 2 housing colors, black and white, and 3 lenses with a beam angle of 18°, 24° or 36°.

Varia-RC: The first fully modular recessed LED downlight!

Technical Details:

- changeable, adjustable LED driver: 28-40W (28, 32, 36, 40 Watt)
- exchangeable LED COB module with the best light quality and high efficiency: CRI >80 or CRI >90 with improved color rendering
- Selectable light colors: 2700K, 3000K, 3500K, 4000K, 5000K, Gold for baked goods, Fresh Meat and Meat Plus for meat and sausage products, Exciting Color 3100K for fashion
- long service life: up to 50,000 hours L80
- lens that can be changed without tools: 18°, 24°, 36°
- 2 body color: white, black
- passive cooling, aluminum heatsink
- LED ballast with junction box and connection terminal for looping through the AC power
- Pivotal luminaire body with flush finish, homogeneous integration in suspended ceilings
- optionally different installation rings and additional adapter rings available for different installation openings
- modular design

Technical Details:

Ambient Temperature (TA):	-10°C - 45°C
Housing Material:	aluminum
Housing Color	white
Coating:	powder-coated
Dimensions	197x31 mm
Cut-Out Dimensions	165-185 mm
Net Weight:	156 g
Warranty	5 years

Information and Downloads:

