


Kompakter Driver für Panel und Downlights

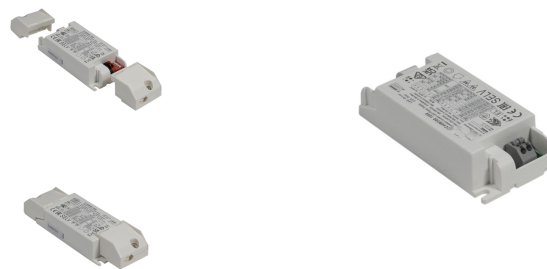

Product information "Kompakter Driver für Panel und Downlights"

Universal LED driver for downlights and panels

- Power select: variable output current in 4 steps selectable: 350, 400, 450, 500, 600, 650, 700mA
- max. 30W
- version for build into luminaires without cable holder boxes
- flickerfree

Technical Details:

Power Consumption:	30 W
Power Factor (PF):	0.92
Ambient Temperature (TA):	-10°C bis +40°C
Housing Material:	plastic
Housing Color	white
Dimensions	137,5x43x27 mm
Net Weight:	0.124 g
Warranty	5 years

Information and Downloads:

