


Kompakter Driver für Panel und Downlights

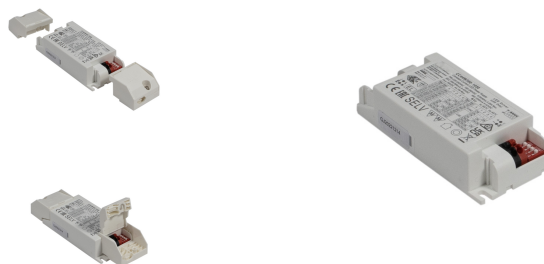

Product information "Kompakter Driver für Panel und Downlights"

Universal LED driver for downlights and panels

- Power select: variable output current in 4 steps selectable: 300-1050mA ,selectable in 50mA steps
- max. 44W
- version for build into luminaires without cable holder boxes
- flickerfree

Technical Details:

Power Consumption:	44 W
Power Factor (PF):	0.92
Ambient Temperature (TA):	-10°C bis +45°C
Housing Material:	plastic
Housing Color	white
Dimensions	97x43,5x29 mm
Net Weight:	127 g
Warranty	5 years

Information and Downloads:

