


DURATA TRACKLINE 42-930-5170LM WFL DA 123lm/W

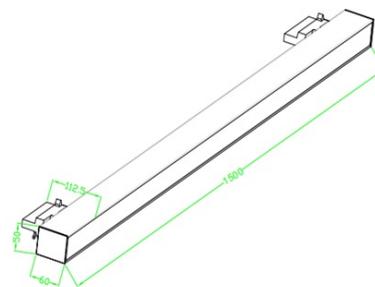

Technical Details:

Luminous Flux:	4880 lm
LED Output:	39 W
Light Yield:	120 lm/W
Light Temperature:	3000 K
Light Color:	warmwhite
Color Rendering Index:	≥90 Ra
Color Consistency (SDCM):	<2
Beam Angle:	110 °
Unified Glare Rating (UGR):	<24
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	DALI,Push-Dim
LED-Chip Manufacturer:	Runlite
LED-Chip:	SMD 2835
Number of LED:	456
Ignition Time:	<0,5 s
Input Current:	AC 200-240V, 200mA, 50/60Hz
Power Consumption:	40 W
Contains Driver:	✓
Driver Manufacturer:	Eaglerise
Power Factor (PF):	>0.95
Input Driver:	plug connector
Output of Driver:	DC 25-42V, 300-1000mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	plug connector
Switching Cycles:	>100.000
Electrical Protection Class:	III
Ambient Temperature (TA):	-25°C - 35°C

Dimensions:	1500x50x60 mm
Mounting:	Decke
Montageart:	surface mounted
IP Class:	20 (20 room side)
IK Code:	05
Housing Color	mattwhite
Housing Color (RAL Code):	similar 9016
Housing Material:	aluminum
Special Feature of Housing:	mit 3-Phasensch. Adapter
Cover:	opal
Net Weight:	1910 g
Type of Packaging:	box
Weight incl. Packaging:	3 kg
Content Master Package:	6
Dimensions of Master Package:	1540x60x140 mm
Weight Master Package:	17,04 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405219090
Certifications	CE
Barcode:	4250557825588
zur Montage an 3-Phasen Dali-Stromschienen	

Information and Downloads:

