

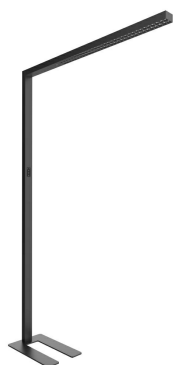



Arbora Vario 80-927/950-10400LM Dim Sensor



Photometric Diagram

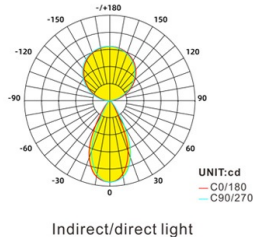

Dimension

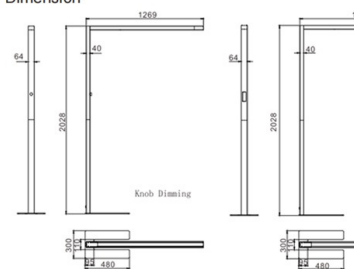

Technical Details:

| | |
|------------------------------|----------------------|
| Luminous Flux: | 10400 lm |
| LED Output: | 80 W |
| Light Yield: | 130 lm/W |
| Light Color: | variabel 2700-5000K |
| Color Rendering Index: | ≥90 Ra |
| Color Consistency (SDCM): | <4 |
| Beam Angle: | 110x50 ° |
| Unified Glare Rating (UGR): | <6 |
| Light Emission: | |
| Dimmable: | ✓ |
| Method of Dimming: | Push-Dim |
| LED-Chip: | SMD 2835 |
| Ignition Time: | <0,5 s |
| Input Current: | AC 220-240V, 50/60Hz |
| Power Consumption: | 80 W |
| Contains Driver: | ✓ |
| Power Factor (PF): | >0.95 |
| Input Driver: | cable with plug |
| CC/CV: | CC |
| Input Lamp: | terminal |
| Switching Cycles: | >200.000 |
| Electrical Protection Class: | I |
| Ambient Temperature (TA): | -20°C - 40°C |
| Storage Temperature: | -25°C - 50°C |

| | |
|---|------------------|
| Dimensions: | 1269x64x2028 mm |
| Mounting: | ground |
| IP Class: | 20 |
| IK Code: | 06 |
| Housing Color | black |
| Housing Material: | aluminum |
| Coating: | powder-coated |
| Special Feature of Housing: | Steel base |
| Cover: | Reflector |
| Net Weight: | 11850 g |
| Type of Packaging: | box |
| Weight incl. Packaging: | 14.26 kg |
| Content Master Package: | 1 |
| Weight Master Package: | 14,26 kg |
| Product Line: | Premio Line |
| Warranty | 5 years |
| Operating Hours: | 50.000 h L80/B10 |
| Disposal Obligation: | ✓ |
| Customs Tariff Number: | 9405499090 |
| Certifications | CE |
| Barcode: | 4250557824314 |
| Lichtaustritt 60W/110° oben und 20W/50° unten | |
| inkl. Präsenz- und Helligkeitssensor, Push Dimmer | |
| Light distribution up/down: 60W/110° and 20W/50° | |
| incl. occupancy detector and brightness detection | |
| separ. Push dimmer for up/down, CCT adjust | |

Information and Downloads:



