




Arbora Vario 80-927/950-10400LM Dim Sensor

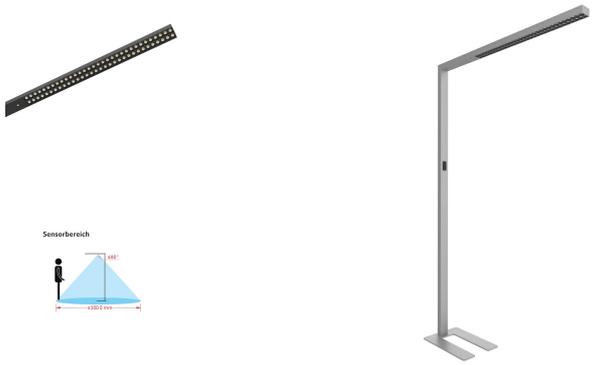

Photometric Diagram

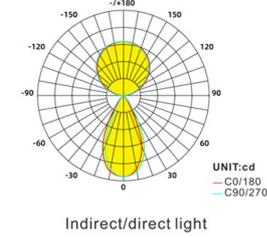

Dimension

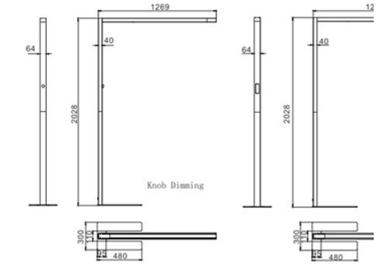

Technical Details:

Luminous Flux:	10400 lm
LED Output:	80 W
Light Yield:	130 lm/W
Light Color:	variabel 2700-5000K
Color Rendering Index:	≥90 Ra
Color Consistency (SDCM):	<4
Beam Angle:	110x50 °
Unified Glare Rating (UGR):	<6
Light Emission:	
Dimmable:	✓
Method of Dimming:	Push-Dim
LED-Chip:	SMD 2835
Ignition Time:	<0,5 s
Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	80 W
Contains Driver:	✓
Power Factor (PF):	>0.95
Input Driver:	cable with plug
CC/CV:	CC
Input Lamp:	terminal
Switching Cycles:	>200.000
Electrical Protection Class:	I
Ambient Temperature (TA):	-20°C - 40°C
Storage Temperature:	-25°C - 50°C

Dimensions:	1269x64x2028 mm
Mounting:	ground
IP Class:	20
IK Code:	02
Housing Color	silver
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	Steel base
Cover:	Reflector
Net Weight:	11850 g
Type of Packaging:	box
Weight incl. Packaging:	14.26 kg
Content Master Package:	1
Dimensions of Master Package:	1342x325x120 mm
Weight Master Package:	13,8 kg
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	50.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE
Barcode:	4250557824307
Lichtaustritt 60W/110° oben und 20W/50° unten	
inkl. Präsenz- und Helligkeitssensor, Push Dimmer	
Light distribution up/down: 60W/110° and 20W/50°	
inkl. occupancy detector and brightness detection	
separ. Push dimmer for up/down, CCT adjust	

Information and Downloads:



