


BEG Deckeneinbau Präsenzmelder PD4-S-DE

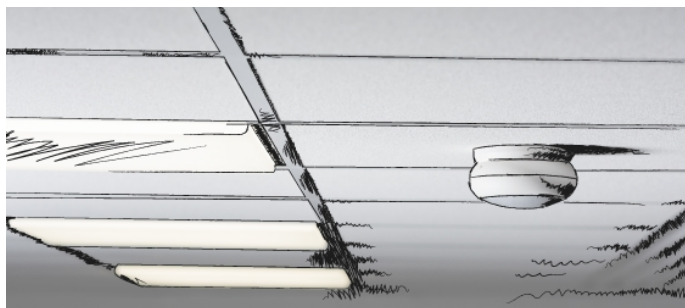

Product information "BEG Deckeneinbau Präsenzmelder PD4-S-DE"

Product Information

- Slave device detector with extended detection area
- For extending the detection area of a Master device
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Compatible with 230 V devices. Concerning exceptions please see the respective master device.



Typical applications: open-plan offices, conference rooms, classrooms/seminar rooms, staircases, small offices, sports halls/ storage rooms

Technical Data

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: FC= Ø 97 x 103 mm
- Power consumption: approx. 0.2 W
- Detection area: vertical 360°
- Range:

max. Ø 24 m across
 max. Ø 8 m towards
 max. Ø 6.4 m seated

- Monitored area (tangential movement): 450 m² / 2.5 m Mounting height
- Mounting height min./max./recommended: 2m, 10m, 2,5m
- Degree / class of protection: FC= IP20 / Class II
- Ambient temperature: -25 °C to +50 °C
- Housing: Polycarbonate, UV-resistant
- output voltage: 110 - 240 V AC
- Pulse interval: 2s or 9s



Technical Details:

Housing Material:	PC
Housing Color	white
Dimensions	97x103 mm
Warranty	2 years

Information and Downloads:

