
Technical Data Sheet

Order number: LG58910


LITEGEAR
LED Lighting Solutions

NOVALOOP Track Ring Light 80060-42-830-4400lm Dali



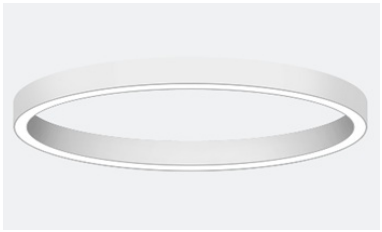





Technical Details:

Luminous Flux:	4400 lm
Light Yield:	105 lm/W
Light Temperature:	3000 K
Light Color:	warmwhite
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<3
Beam Angle:	120 °
Unified Glare Rating (UGR):	<22
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	DALI
LED-Chip Manufacturer:	Everlight
LED-Chip:	SMD 2835
Number of LED:	624
Ignition Time:	<0,5 s
Input Current:	AC 220 - 240V, 50/60Hz
Power Consumption:	42 W
Contains Driver:	✓
Driver Manufacturer:	Powergear
Power Factor (PF):	>0.97
Input Driver:	lighting track
Output of Driver:	DC 5-38V, 1050mA
CC/CV:	CC
Input Lamp:	Terminal
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 35°C
Storage Temperature:	-20°C - 45°C

Dimensions:	800x60 mm
Mounting:	Deckenabhängung
Montageart:	surface mounted
IP Class:	20 (20 room side)
Housing Color	white
Housing Material:	aluminum
Coating:	powder-coated
Cover:	opal
Net Weight:	3860 g
Type of Packaging:	box
Dimensions of Packaging:	850x850x100
Weight incl. Packaging:	5.27 kg
Content Master Package:	1
Dimensions of Master Package:	850x850x100 mm
Weight Master Package:	3,58 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	79.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE,LM80,SELV
Barcode:	4250557825571
200cm Seilabhängung Dali Stromschienadapter	
B10: 38x / B16: 62x / B20: 77 / C10: 38x / C16: 62	

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de

