


TAGIRA UGR LINE 40-830-850-3600LM max.

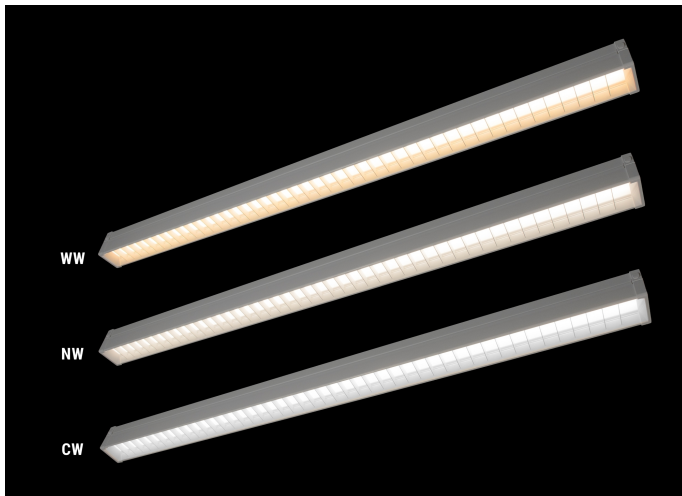

Product information "TAGIRA UGR LINE 40-830-850-3600LM max."

Linear low UGR LED batten light

- Low glare rating for computer work station UGR < 19
- Power Select: 20, 30, 40W switchable Multilumen: (2200lm, 3000lm, 3600lm) max. 110lm/W
- CCT-Select: switchable light colours: 3000K, 4000K, 5000K
- Direct surface mounting or suspended via 2 steel ropes.

Applications:

School, Kindergarten, Meeting Rooms, Hallways, Shop, Counter, Magazines, Education



Technical Details:

Luminous Flux	4400 lm
Light Yield:	110 lm/W
Light Temperature:	3000, 4000, 5000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	4
Power Consumption:	20, 30, 40 W
Power Factor (PF):	0.9
Operating Hours:	>50.000 h L80/B20
Switching Cycles:	>50.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-25°C - 45°C
Housing Material:	Stahlblech + plastic
Housing Color	white
Coating:	powder-coated
Dimensions	1183x67x73 mm
Net Weight:	1135 g
Warranty	3 years

Information and Downloads:

