


ORI-L 24-830-850-2880LM-IP64 Sensor

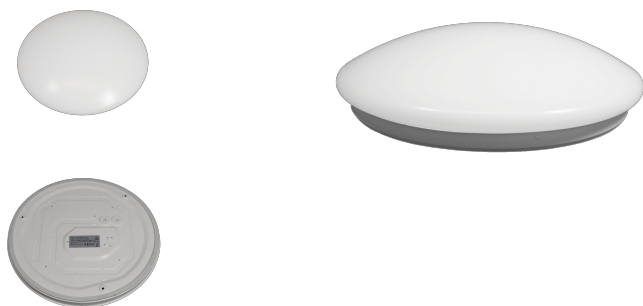

Technical Details:

Luminous Flux:	2880 lm
LED Output:	21 W
Light Yield:	120 lm/W
Light Temperature:	3000, 4000, 5000 K
Light Color:	CCT Select
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<4
Beam Angle:	120 °
Light Emission:	downward
LED-Chip Manufacturer:	Zhaoyuan
LED-Chip:	SMD 2835
Number of LED:	40
Ignition Time:	<0,5 s
Input Current:	AC 220-240V, 50/60Hz, DC 200-250V
Power Consumption:	Power Select (17, 24 W)
Contains Driver:	✓
Driver Manufacturer:	MOHO
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 84-96V, 240mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	Terminal
Switching Cycles:	>30.000
Ambient Temperature (TA):	-20°C - 40°C
Storage Temperature:	-20°C - 40°C

Dimensions:	360x92 mm
Mounting:	ceiling,wall
Montageart:	surface mounted
IP Class:	64
IK Code:	02
Housing Color	white
Housing Color (RAL Code):	similar 9003
Housing Material:	steel
Coating:	lacquered
Special Feature of Housing:	PMMA cover
Cover:	opal
Net Weight:	597 g
Type of Packaging:	box
Dimensions of Packaging:	400x400x100
Weight incl. Packaging:	0.935 kg
Content Master Package:	5
Dimensions of Master Package:	535x420x425 mm
Weight Master Package:	5,5 kg
Product Line:	Essential Line
Warranty	3 years
Operating Hours:	50.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE
Barcode:	4250557825526
Power Select und CCT Select	
weiche, gleichmäßige Ausleuchtung	
integr. Motion Sensor: Zeit: 5s, 1,3, 10min	
Lux Level: 25Lux, disable	

Information and Downloads:

