



# ORI-L 24-830-850-2880LM-IP64

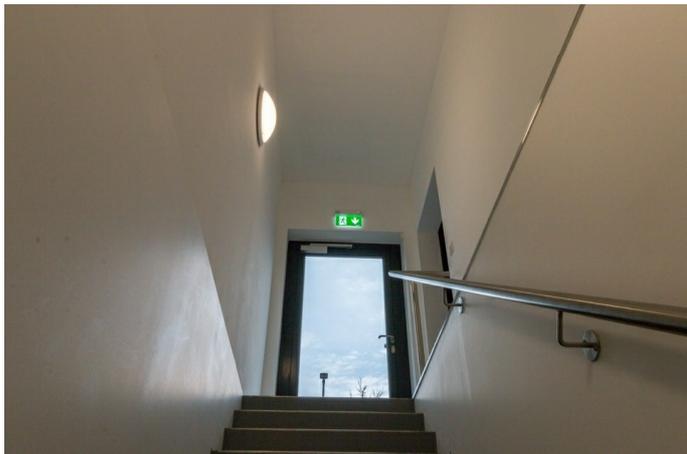

## Product information "ORI-L 24-830-850-2880LM-IP64"

LED wall - / Ceiling light OneFitAll

- CCT Select: 3000K, 4000K, 5000 Kelvin
- Power Select: 12W, 17W, 24W
- High system efficiency: 120lm/W 2880lm@ 24W 4000K
- timeless, mushroom design
- prilliminaire weather and dust proof IP64
- compact housing
- applications: stoarage rooms, corridors, residential, bath room, outside under cannopies,
- easy installation
- also available with integrated motion sensor (LG5857)

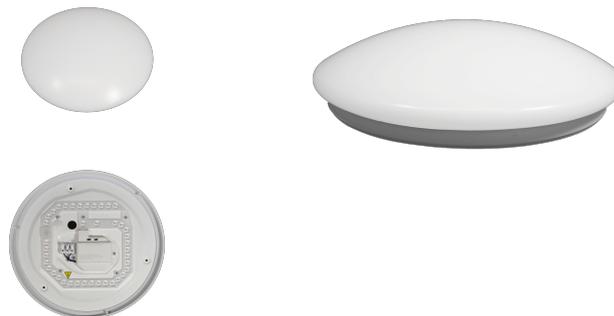

### Technical Details:

Luminous Flux	2880 lm
Light Yield:	120 lm/W
Light Temperature:	3000, 4000, 5000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	4
Power Consumption:	12, 17, 24 W
Power Factor (PF):	0.9
Operating Hours:	>50.000 h L80/B10
Switching Cycles:	>30.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 40°C
Housing Material:	Stahl + plastic
Housing Color	white
Coating:	lacquered
Dimensions	360x92 mm
Net Weight:	597 g
Warranty	3 years

Information and Downloads:

