


Emergy TWIN HP 3/6-740-500/1000lm AST WH

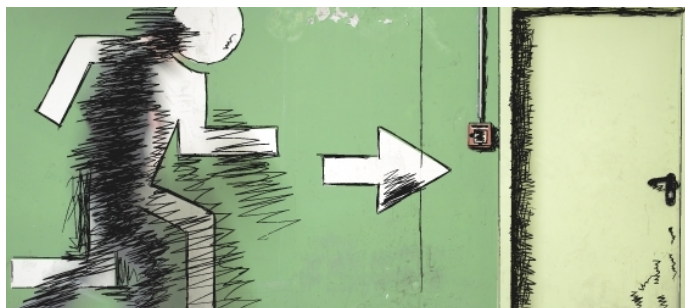

Product information "Emergy TWIN HP 3/6-740-500/1000lm AST WH"

LED escape route light

Safety light with single battery supply for escape route lighting. 3 hours emergency lighting with long lasting Li-Ion battery. High brightness and wide dispersion angle with 2 adjustable LED heads. LED light source with long life up to 50,000 hours. LED status display via green status LED. Can be used mobile in event applications or in large rooms, warehouse, staircase house or outside. Automatic self test function: monthly short function test and annual full duration test with status indication via LED indication.

- Beam angle: symmetrical > 120 °
- LED: 2 x 1,5W
- Luminous flux: typ. 2 x 175 lumen (high system efficiency)
- high power saving compared to traditional emergency lights >70%



Technical Details:

Luminous Flux	1000 lm
Light Yield:	167 lm/W
Light Temperature:	4000 K
Color Rendering Index (CRI)	≥70 Ra
Color Consistency (SDCM):	6
Power Consumption:	6 W
Power Factor (PF):	0.5
Operating Hours:	>50.000 h L70/B50
Switching Cycles:	>50.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	0°C - 40°C
Housing Material:	Polycarbonat
Housing Color	white
Pivot Range pan:	180 °
Pivot Range tilt:	150 °
Dimensions	226x62x227,3 mm
Net Weight:	680 g
Warranty	5 years

Information and Downloads:

