


NOPA Batterie Notstromtreiber HV 6W IP65

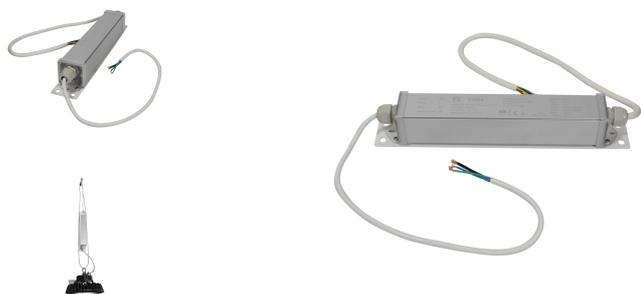

Technical Details:

Input Current:	AC 220-240VV, 50/60Hz
Input Driver:	cable with flying leads
Output of Driver:	DC 50-300V, Konstant Leistung WmA
Input Lamp:	terminal
Electrical Protection Class:	I
Ambient Temperature (TA):	0°C - 45°C
Storage Temperature:	0°C - 50°C

Information and Downloads:



Dimensions:	300x53x52 mm
Montageart:	surface mounted
IP Class:	65
Housing Color	aluminium
Housing Material:	aluminum
Special Feature of Housing:	nur für Highbay geeignet
Net Weight:	838 g
Luminaire Type:	Fluchtwegleuchtung
Testing Facility:	automatischer Selbsttest
Forward Voltage Range:	50-300V
Battery Warranty:	3
Discharge Duration:	≥ 1 h
Battery Type:	Li-Ion
Battery Current:	5000 mA
Battery Charge Duration:	8 h
Initial Charge Duration:	16 h
Charging Power Consumption:	5 W
Battery Cell Quantity	2
Standards for emergency luminaires:	DIN EN 60598-2-22, DIN EN 62034: 2012, Anforderung nach DIN EN 50172
Type of Packaging:	box
Weight incl. Packaging:	0.88 kg
Content Master Package:	20
Weight Master Package:	17,78 kg
Product Line:	Advance Line
Warranty	3 years
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE
Barcode:	4260733770175

Entladezeitraum: 1h bei 6,0W and 3h by 3W

Umschaltweiche für CC- Treiber

autom. wöchentlicher und jährlicher Selbsttest

green/rede Status LED Test by IR Remote