


Alvera Line MKII 600 22-860-3000LM DIM Feuchtraum-/Maschinenleuchte

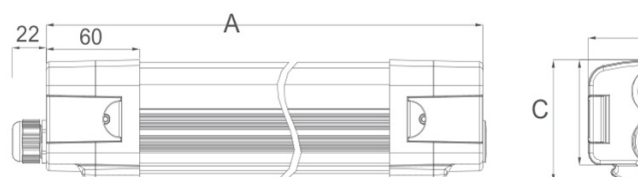

Product Name	A	B	C
2ft/60cm	600	83.8	72.8

Technical Details:

Luminous Flux:	3000 lm
LED Output:	20 W
Light Yield:	136 lm/W
Light Temperature:	6000 K
Light Color:	daylight
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<5
Beam Angle:	120 °
Unified Glare Rating (UGR):	<19
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	1-10V,PWM,Poti
LED-Chip Manufacturer:	San'an
LED-Chip:	SMD 2835
Number of LED:	143
Ignition Time:	<0,5 s
Input Current:	AC 100-277V, 50/60Hz
Power Consumption:	22 W
Contains Driver:	✓
Driver Manufacturer:	Lifud
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 25-42V, 550mA
CC/CV:	CC
Input Lamp:	Terminal
Switching Cycles:	>100.000
Electrical Protection Class:	I

Dimensions:	600x84x73 mm
Mounting:	ceiling,wall
Montageart:	surface mounted
IP Class:	65
IK Code:	10
Housing Color	white
Housing Material:	aluminum
Special Feature of Housing:	opt. Polycarbonat Cover
Cover:	opal
Net Weight:	1330 g
Type of Packaging:	box
Dimensions of Packaging:	700x94x83
Weight incl. Packaging:	1.95 kg
Content Master Package:	4
Dimensions of Master Package:	715x190x215 mm
Weight Master Package:	7,8 kg
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	50.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE,LM80,SELV,CB
Barcode:	4250557826363
Einfache, und schnelle Montage In/out	
Schnellverschluß Endkappen	
CE, UL, FCC, LM80, TM21	
dimmbare Version: 1-10V, PWM, Rx Poti	

Storage Temperature:	-25°C - 55°C
----------------------	--------------

Information and Downloads:

