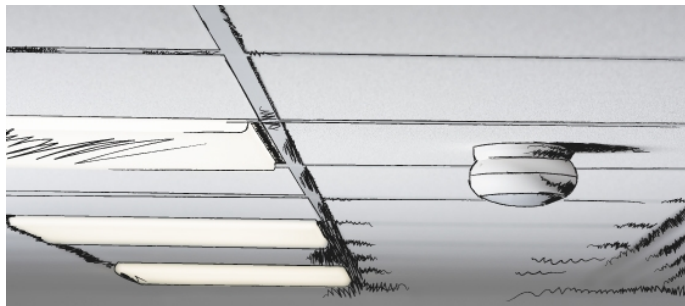


BEG Einbau Präsenzmelder PD2-S-DE



Product information "BEG Einbau Präsenzmelder PD2-S-DE"

Part No. 92166

Product Information

- Slave device detector with circular detection area
- For extending the detection area of a Master device
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Compatible with all Master devices except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB, PD4-M-DAA4G, Indoor 140-L, PD2N-M-1C-LED
- Typical applications:

Offices, conference rooms, schools, nursery schools, hospitals

Technical Data

Voltage:

110 - 240 V AC 50 / 60 Hz

Dimensions:

SM= Ø 98 x 50 mm

FM= Ø 98 x 65 mm

FC= Ø 80 x 85 mm

Power consumption:

approx. 0.2 W

Detection area:

vertical 360°

Range:

max. Ø 10 m across

max. Ø 6 m towards

max. Ø 4 m seated

Monitored area (tangential movement):

79 m² / 2.5 m Mounting height

Mounting height min./max./recommended:

2 m / 5 m / 2.5 m

Degree / class of protection:

SM= IP20 / Class II

FM= IP20 / Class II

FC= IP20 / Class II

Ambient temperature:

-25 °C to +50 °C

Housing:

Polycarbonate, UV-resistant



Pulse interval:

Änderungen vorbehalten

Technical details are subject to change

(c) 2017

 Litegear GmbH
 An Fürthenrode 45
 52511 Geilenkirchen

 Tel.: +49 (0)2451 48453-0
 Fax: +49 (0)2451 48453-13
 www.litegear.de


Technical Details:

Housing Material:	plastic
Housing Color	white
Dimensions	80x18 mm
Cut-Out Dimensions	64 mm

Information and Downloads:

