



# ESTELLA STYLE 60-840-7800LM DALI 2.0 DIM WH

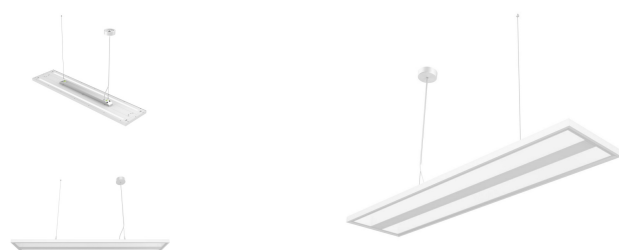

## Technical Details:

|                              |                        |
|------------------------------|------------------------|
| Luminous Flux:               | 7800 lm                |
| Light Yield:                 | 130 lm/W               |
| Light Temperature:           | 4000 K                 |
| Light Color:                 | neutralwhite           |
| Color Rendering Index:       | ≥81 Ra                 |
| Color Consistency (SDCM):    | <4                     |
| Beam Angle:                  | 90 °                   |
| Unified Glare Rating (UGR):  | <17                    |
| Light Emission:              |                        |
| Dimmable:                    | ✓                      |
| Method of Dimming:           | DALI,Push-Dim          |
| LED-Chip:                    | SMD 2835               |
| Number of LED:               | 468                    |
| Ignition Time:               | <0,5 s                 |
| Input Current:               | AC 200 - 240V, 50/60Hz |
| Power Consumption:           | 60 W                   |
| Contains Driver:             | ✓                      |
| Driver Manufacturer:         | Boke                   |
| Power Factor (PF):           | >0.9                   |
| Input Driver:                | terminal               |
| Output of Driver:            | DC 3-42V, 1650mA       |
| CC/CV:                       | CC                     |
| Input Lamp:                  | Terminal               |
| Switching Cycles:            | >100.000               |
| Electrical Protection Class: | II                     |
| Ambient Temperature (TA):    | -25°C - 40°C           |
| Storage Temperature:         | -25°C - 50°C           |

|                                            |                               |
|--------------------------------------------|-------------------------------|
| Dimensions:                                | 1200x280x64 mm                |
| Mounting:                                  | Decke                         |
| Montageart:                                | surface mounted               |
| IP Class:                                  | 20                            |
| IK Code:                                   | 02                            |
| Housing Color                              | white                         |
| Housing Color (RAL Code):                  | similar 9016                  |
| Housing Material:                          | aluminum                      |
| Coating:                                   | powder-coated                 |
| Special Feature of Housing:                | UGR<17                        |
| Cover:                                     | prismatic                     |
| Net Weight:                                | 6540 g                        |
| Type of Packaging:                         | box                           |
| Weight incl. Packaging:                    | 8.46 kg                       |
| Content Master Package:                    | 1                             |
| Dimensions of Master Package:              | 1310x350x110 mm               |
| Weight Master Package:                     | 8,46 kg                       |
| Product Line:                              | Advance Line                  |
| Warranty                                   | 5 years                       |
| Operating Hours:                           | 60.000 h L80/B10              |
| Disposal Obligation:                       | ✓                             |
| Customs Tariff Number:                     | 9405499090                    |
| Certifications                             | CE                            |
| Barcode:                                   | 4250557824581                 |
| Lichtaustritt:                             | 50% nach oben, 50% nach unten |
| light distribution:                        | 50% up, 50% down              |
| Inkl. Anschlussrosette, incl. terminal box |                               |
| Photobiological safety EN 62471:           | RG1                           |
| Dimmbar:                                   | Dali Push dim                 |

Information and Downloads:

