



# ESTELLA STYLE 60-840-7800LM DALI 2.0 DIM BK

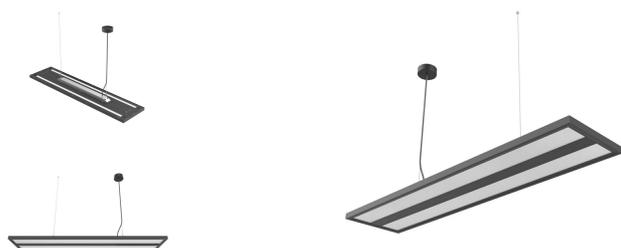

## Technical Details:

Luminous Flux:	7800 lm
Light Yield:	130 lm/W
Light Temperature:	4000 K
Light Color:	neutralwhite
Color Rendering Index:	≥81 Ra
Color Consistency (SDCM):	<4
Beam Angle:	90 °
Unified Glare Rating (UGR):	<17
Light Emission:	
Dimmable:	✓
Method of Dimming:	DALI,Push-Dim
LED-Chip Manufacturer:	Lumileds
LED-Chip:	SMD 2835
Number of LED:	468
Ignition Time:	<0,5 s
Input Current:	AC 200 - 240V, 50/60Hz
Power Consumption:	60 W
Contains Driver:	✓
Driver Manufacturer:	Boke
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 2-42V, 1650mA
CC/CV:	CC
Input Lamp:	Terminal
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-25°C - 40°C
Storage Temperature:	-25°C - 50°C

Dimensions:	1200x28x64 mm
Mounting:	Decke
Montageart:	surface mounted
IP Class:	20
IK Code:	02
Housing Color	black
Housing Color (RAL Code):	similar 9005
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	UGR<17
Cover:	prismatic
Net Weight:	6540 g
Type of Packaging:	box
Weight incl. Packaging:	8.46 kg
Content Master Package:	1
Dimensions of Master Package:	1310x350x110 mm
Weight Master Package:	8,46 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	60.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405499090
Certifications	CE,ENEC
Barcode:	4250557824598
Lichtaustritt: 50% nach oben, 50% nach unten	
light distribution: 50% up, 50% down	
Inkl. Anschlussrosette, incl. terminal box	
Photobiological Safety EN62471: RG1	
Dimmbar: Dali Push dim	

Information and Downloads:

