
Product Information

Order number: LG30807

Ekova SELECT 150 30-50/830-865/6000lm





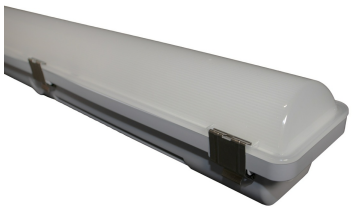

Technical Details:

Luminous Flux	6000 lm
Light Yield:	120 lm/W
Light Temperature:	3000, 4000, 6500 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	5
Power Consumption:	30, 40, 50 W
Power Factor (PF):	0.9
Operating Hours:	>50.000 h L80/B20
Switching Cycles:	>50.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-25°C - 45°C
Housing Material:	Polycarbonat
Housing Color	grey
Dimensions	1500x80x77 mm
Net Weight:	1780 g
Warranty	3 years

Information and Downloads:

Product information "Ekova SELECT 150 30-50/830-865/6000lm"

IP65 LED damp proof light OneFitAll

Ekova Select by Litegear® is the perfect alternative to conventional moisture-proof fluorescent tube luminaires. Simply dismantle the old luminaire and replace it with a almost maintenance-free Ekova LED luminaire. An expensive retrofitting with LED tubes and necessary rewiring of luminaires with electronic balasts is no longer necessary. For almost the same price you get a completely new luminaire replacement with long-lasting LED technology and higher efficiency. Fast amortization with up to 65% electricity savings. Retrova can be mounted as a wall or ceiling light or suspended by means of optional steel cables. Ekova is very robust with IP65 ingress protection and IK08 impact class protection.

OneFitAll Edition with selectable CCT via Switsch on the LED-driver: 3000, 4000, 6500 Kelvin and power select: 30, 40, 50W = Multilumen: 4200, 5200, 6000 Lumen max. 140lm/W
Easy installtion accessory kits like motion sensor and emergency battery kit as plug and play solution. Any time easy toll free installation!
Stainless steel clips and installtion brackets with long sliding space, hence existing dowels can be used.

Advantages:

- wire through 4 x 1,5mm² with 2 x terminal block 4 pin, L1, L2 permanent phase for battery emergency, N, PE 4 x 2,5mm²
- flexible installation brackets and stainless steel clip lockers.
- easy to change light carrier board with electrical terminal with in/out/trough link function
- Low surface temperature below 80°C
- also available in Dali 2.0 dimming version

Applications:
warehouse, seller, storage rooms, outdoor, cold storage, car service, factory, workshop

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de