


RENOVIA 127/36-40-830/840-5400LM BAP, PMMA

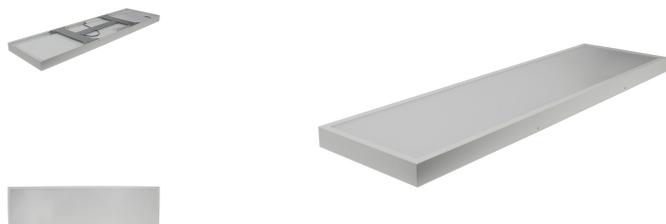

Technical Details:

| | |
|------------------------------|-----------------------------|
| Luminous Flux: | 5400 lm |
| Light Yield: | 140 lm/W |
| Light Temperature: | 3000, 3500, 4000 K |
| Light Color: | CCT Select |
| Color Rendering Index: | ≥80 Ra |
| Color Consistency (SDCM): | <4 |
| Beam Angle: | 90 ° |
| Unified Glare Rating (UGR): | <19 |
| Light Emission: | downward |
| LED-Chip Manufacturer: | San'an |
| LED-Chip: | SMD 2835 |
| Number of LED: | 80 |
| Ignition Time: | <0,5 s |
| Input Current: | AC 200-240V, 50/60Hz |
| Power Consumption: | Power Select (33, 36, 40 W) |
| Contains Driver: | ✓ |
| Driver Manufacturer: | AGT M2C |
| Power Factor (PF): | >0.95 |
| Input Driver: | terminal |
| Output of Driver: | DC 25-40V, 800-1000mA |
| CC/CV: | CC |
| Output Current Adjustable: | ✓ |
| Input Lamp: | plug connector |
| Switching Cycles: | >100.000 |
| Electrical Protection Class: | II |
| Ambient Temperature (TA): | -30°C - 45°C |
| Storage Temperature: | -30°C - 80°C |

| | |
|-------------------------------|--------------------------------|
| Dimensions: | 1270x360x55 mm |
| Mounting: | ceiling,wall |
| Montageart: | surface mounted |
| IP Class: | 20 (40 room side) |
| IK Code: | 04 |
| Housing Color | white |
| Housing Color (RAL Code): | similar 9016 |
| Housing Material: | aluminum |
| Coating: | powder-coated |
| Special Feature of Housing: | zweiget. Anbaugehäuse |
| Cover: | Mikroprismatisch PMMA |
| Net Weight: | 4870 g |
| Type of Packaging: | box |
| Weight incl. Packaging: | 5.63 kg |
| Content Master Package: | 4 |
| Dimensions of Master Package: | 1335x390x425 mm |
| Weight Master Package: | 24,5 kg |
| Product Line: | Advance Line |
| Warranty | 5 years |
| Operating Hours: | 70.000 h L80/B10 |
| Disposal Obligation: | ✓ |
| Customs Tariff Number: | 9405119090 |
| Certifications | CE |
| Barcode: | 4250557827025 |
| Power Select: | 33, 36, 40W / 850, 950, 1050mA |
| CCT Select | 3000, 3500, 4000K 130-140lm/W |
| PMMA Lightguideplate, | anti yellow |
| blendfrei: | Bildschirmarbeitsplatztauglich |
| Flickerfree | |

Information and Downloads:

