

MODULUX OFFICE Linear LED- Modul 60-18/24-935-3940lm-WH




Product information "MODULUX OFFICE Linear LED- Modul 60-18/24-935-3940lm-WH"

Linear LED tracklight for 3-phase trackrails

Elegant, flat LED luminaire with integrated 3-phase track adapter which is completely integrated in the standard track rails. Elegant, ultra flat appearance only 11mm high and 60mm wide. Version with optimized Glare rating UGR< 19 DIN EN 12464-1.

Perfect for office applications, supermarket cashier area, show room, corridors, exhibition

- Easy and fast installation using 3-phase trackrail adapters.
- 3 selectable power phases, compatible with all common track systems
- Adjustment output power select: Adjustable LED driver 18, 20, 22, 24 Watt
- Modular structure of LED louver
- The individual modules can be seamlessly lined up. It creates the impression of a continuous line of light.
- Good heat dissipation and optimal light distribution
- Also available with dimmable Dali 2.0 driver on request.
- Available in 2 housing colors: black, white
- Long-life LED technology: up to 50,000 hours L80 B10
- Standard light colors. 3000K, 4000K optional: 2700K, 3500K, 5000K, 6000K
- available in two lengths: 60cm and 150cm

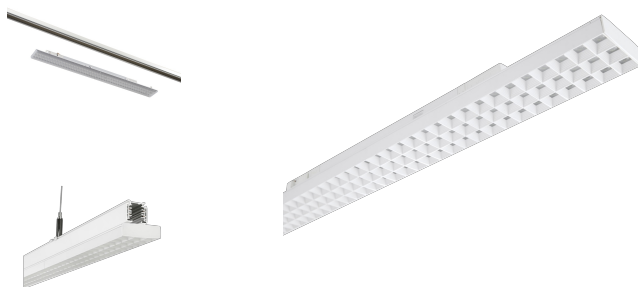

Technical Details:

Luminous Flux	3940 lm
Light Yield:	164 lm/W
Light Temperature:	3500 K
Color Rendering Index (CRI)	≥90 Ra
Color Consistency (SDCM):	3
Power Consumption:	18,20,22,24 W
Power Factor (PF):	0.95
Operating Hours:	>60.000 h L80/B10
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 40°C
Housing Material:	Stahlblech+PC
Housing Color	white
Coating:	powder-coated
Dimensions	600x62x20 mm
Net Weight:	550 g
Warranty	5 years

Information and Downloads:



