


RENOVIA 150/30-40-830/840-5200LM BAP, PMMA

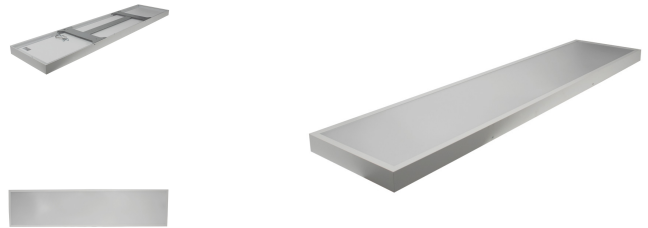

Technical Details:

Luminous Flux	5200 lm
Light Yield:	130 lm/W
Light Temperature:	3000, 3500, 4000 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	3
Power Consumption:	33, 36, 40 W
Power Factor (PF):	0.95
Operating Hours:	>70.000 h L80/B10
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-30°C - 45°C
Housing Material:	aluminum
Housing Color	white
Coating:	powder-coated
Dimensions	1500x300x50 mm
Net Weight:	4120 g
Warranty	5 years

Product information "RENOVIA 150/30-40-830/840-5200LM BAP, PMMA"

Surface mounting renovation luminaire with low UGR

Timeless surface mount luminaire. Easy install on flat surfaces such as concrete, wood or plaster boards. Fast installation due to separate ceiling mounting plate. The LED light is simply hung in the holder, easy for service! Uniform, wide light distribution with low glare due to microprismatic optical material. Optical part made of UV and temperature-resistant PS Diffuser. Eye-friendly, flicker-free LED light. Long life electronic driver > 50,000 hours.

- Optionally available in dimmable version: Dali, Push-Dim, 1-10V, Radio, Zigbee
- Available in 3 different sizes and power ranges.

Applications:

- Office, conference room, computer workstation BAP UGR < 19 EN12464-1
- laboratory, hospital, fitness center
- hall and reception
- Sanitary facilities and corridors

Information and Downloads:



