


RENOVIA 127/36-40-830/840-5200LM BAP, PMMA DALI DT6 Push Dim

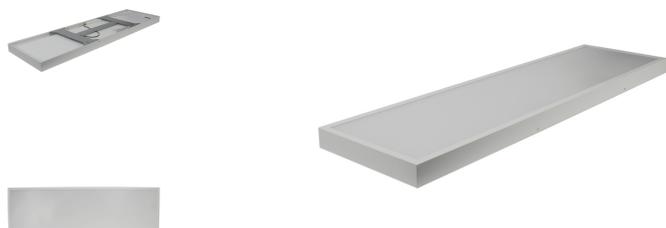

Technical Details:

Luminous Flux:	5200 lm
Light Yield:	130 lm/W
Light Temperature:	3000, 4000 K
Light Color:	CCT Select
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<5
Beam Angle:	90 °
Unified Glare Rating (UGR):	<19
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	DALI,Push-Dim,DALI-2
LED-Chip Manufacturer:	San'an
LED-Chip:	SMD 2835
Number of LED:	80
Input Current:	AC 200-240V, 50/60Hz
Power Consumption:	Power Select (32, 36, 40 W)
Contains Driver:	✓
Driver Manufacturer:	Lifud LF-GSD040YE
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 25-42V, 850-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	plug connector
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-30°C - 45°C
Storage Temperature:	-30°C - 80°C

Dimensions:	1270x360x55 mm
Mounting:	ceiling,wall
Montageart:	surface mounted
IP Class:	20 (40 room side)
IK Code:	04
Housing Color	white
Housing Color (RAL Code):	similar 9016
Housing Material:	aluminum
Coating:	powder-coated
Special Feature of Housing:	zweiget. Anbaugehäuse
Cover:	Mikroprismatisch PMMA
Net Weight:	4069 g
Type of Packaging:	box
Weight incl. Packaging:	4.97 kg
Content Master Package:	4
Dimensions of Master Package:	1340x398x425 mm
Weight Master Package:	25,03 kg
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	70.000 h L80/B10
Disposal Obligation:	✓
Customs Tariff Number:	9405119090
Certifications	CE
Barcode:	4250557827032
Power Select:	32, 36, 40W / 850, 950, 1050mA
CCT Select	3000/4000K, Dali dimmbar DT6 Push Dim
PMMA Lightguideplate,	anti yellow
blendfrei:	Bildschirmarbeitsplatztauglich
Load:	B10: 25, B16: 35, C16: 35 Leuchten

