


Kompakter Driver für Panel und Downlights Triac Dim

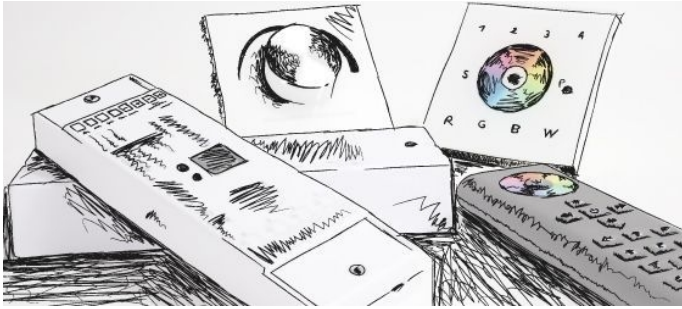

Product information "Kompakter Driver für Panel und Downlights Triac Dim"

Universal LED driver for downlights and panels

- Power select: variable output current in 4 steps selectable: 700, 800, 950, 1050mA
- max. 40W (26,6-39,9W)
- perfect for dimming panels and downlights
- flickerfree
- Dimming: trailing or leading edge 10-100%
- Safety norms: EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62493:2015, AS/NZS IEC61347.2.13:2013, AS/NZS 61347.1:2016
- EMC Standards: EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62493:2015, AS/NZS IEC61347.2.13:2013, AS/NZS 61347.1:2016
- Efficiency: 86%

Technical Details:

Power Consumption:	26,6-39,9W
Power Factor (PF):	0.92
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	plastic
Housing Color	white
Dimensions	132,5x44x30 mm
Net Weight:	197 g
Warranty	5 years

Information and Downloads:

