


# Kompakter, linearer Driver für Feuchtraumleuchten DALI

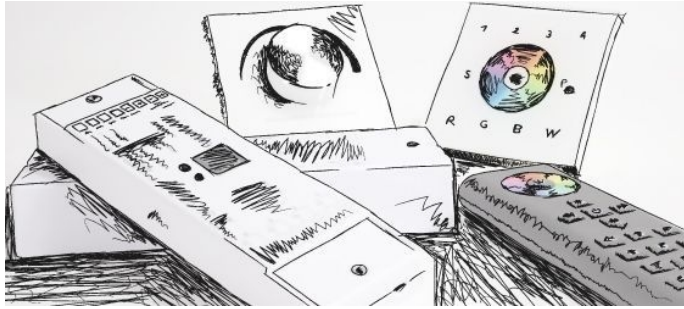

## Product information "Kompakter, linearer Driver für Feuchtraumleuchten DALI"

DALI LED driver with selectable output current of 250-1050mA via NFC

- Universal LED ballast for recessed and surface mounting
- Adjustable output current: 250-1050mA max. 100W
- Flicker-free

## Technical Details:

Power Consumption:	108 W
Power Factor (PF):	0.95
Operating Hours:	>100.000 h
Ambient Temperature (TA):	-25°C - 50°C
Housing Material:	sheet metal
Housing Color	white
Dimensions	280x30x21 mm
Net Weight:	164 g
Warranty	5 years

Information and Downloads:

