
Technical Data Sheet

Order number: LG50377


LITEGEAR
LED Lighting Solutions

Kompakter DALI-2 DT8 dual white Treiber NFC







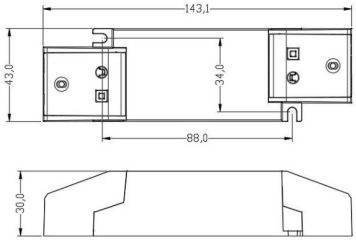

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI,Push-Dim,DALI-2
Input Current:	AC 198-264V, 290mA, 50/60Hz, DC 180-280V
Power Consumption:	50 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.97
Input Driver:	terminal
Output of Driver:	DC 2,5-45V, 300-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-25°C - 45°C
Storage Temperature:	-20°C - 90°C

Dimensions:	97x43x30 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	152 g
Type of Packaging:	none
Dimensions of Packaging:	410x233x225
Weight incl. Packaging:	0.173 kg
Content Master Package:	112
Dimensions of Master Package:	410x233x225 mm
Weight Master Package:	19,36 kg
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	75.000 h TC<85°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,TÜV,ENEC,SELV
Output current can be set via NFC in 1 mA steps	

Information and Downloads:

Änderungen vorbehalten
Technical details are subject to change
(c) 2017

Litegear GmbH
An Fürthenrode 45
52511 Geilenkirchen

Tel.: +49 (0)2451 48453-0
Fax: +49 (0)2451 48453-13
www.litegear.de