



# Kompakter DALI-2 Treiber



Output Current	1	2	3
000mA	-	-	ON
005mA	-	-	ON
010mA	-	ON	ON
015mA	-	ON	ON
020mA	ON	-	ON
025mA	ON	-	ON
030mA	ON	ON	-
035mA	ON	ON	-

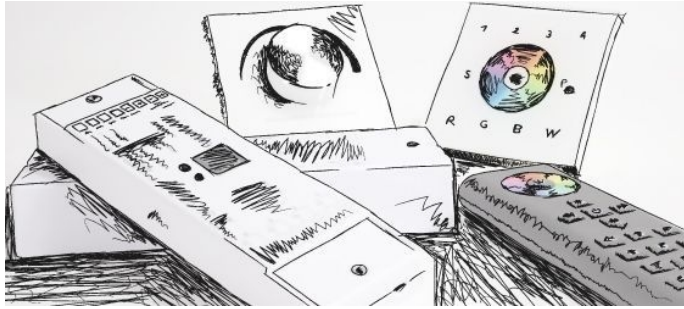

## Product information "Kompakter DALI-2 Treiber"

### Dali 2 LED Power Supply

Constant current DC output LED driver with multi level selectable output current by dip switch. DALI- interface and push dim dimming. high efficiency up to 84%, with the fanless design for LED indoor lighting

#### Applications:

- LED office lighting
- LED architectural lighting
- LED panel and downlighting

#### Features

- ? DALI or PUSH dimming
- ? Constant current output and output current adjustable via DIP switch
- ? Built-in active PFC function
- ? Standby power consumption < 0.5W
- ? IP20
- ? Suitable for Class II light fixtures
- ? 5-year warranty (please refer to the warranty condition)

## Technical Details:

Power Consumption:	35 W
Power Factor (PF):	0.98
Operating Hours:	>75.000 h TC<75°C
Switching Cycles:	>100.000
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	plastic
Housing Color	white
Dimensions	98x44x23 mm
Net Weight:	92 g
Warranty	5 years

#### Information and Downloads:

