



Kompakter, linearer Driver Feuchtraumleuchten

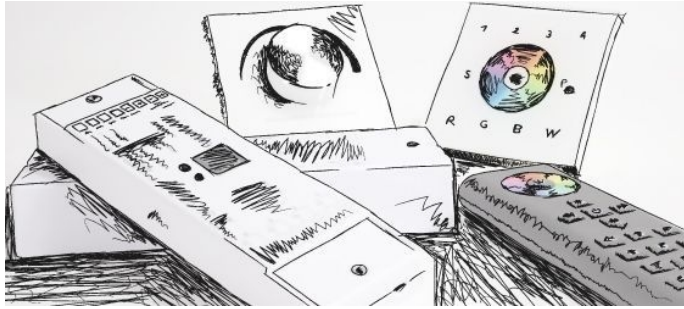

Product information "Kompakter, linearer Driver Feuchtraumleuchten"

Universal LED driver for downlights and panels by NFC

- Power select: variable output current in 4 steps selectable: 300 to 1050mA
- max. 50W
- version for build into luminaires without cable holder boxes
- flickerfree
- 89% efficiency

Safety Standards

EN61347-1:2015/A1:2021; EN61347-2-13:2014/A1:2017;
EN62384:2006/A1:2009; AS 61347.2.13:2018;
AS/NZS61347.1:2016; BS EN61347-1:2015/A1:2021;
BS EN61347-2-13:2014/A1:2017;

Technical Details:

Power Consumption:	50 W
Power Factor (PF):	0.95
Switching Cycles:	>200.000
Ambient Temperature (TA):	-10°C bis +75°C
Housing Material:	steel
Housing Color	white
Dimensions	280x29,4x21 mm
Warranty	5 years

Information and Downloads:

