


# Kompakter, linearer Driver Feuchtraumleuchten

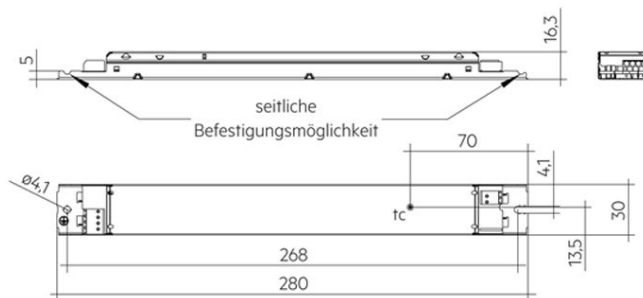

## Technical Details:

Input Current:	AC 198-264V, 350mA, 50/60Hz, DC 180-280V
Power Consumption:	50 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 20-50V, 300-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>200.000
Electrical Protection Class:	I
Compatible with Emergency Current:	✓
Ambient Temperature (TA):	-10°C bis +75°C
Storage Temperature:	-10°C bis +55°C

Dimensions:	280x29,4x21 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	steel
Special Feature of Housing:	nur für Einbau gedacht
Weight incl. Packaging:	0.17 kg
Content Master Package:	20
Product Line:	Advance Line
Warranty	5 years
Certifications	CE,ENEC,SELV
Power Select:	300-1050mA
	perfect for LED triproof lights
	max. driver on 16A breaker: B Type: 19,C Type: 30

Information and Downloads:

