


Allestra MKII 30/60-727/740-9600LM IP66 IK08 0-10V PWM Dim

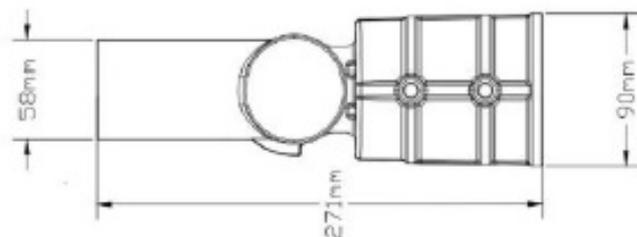

Technical Details:

Luminous Flux:	9600 lm
LED Output:	58 W
Light Yield:	160 lm/W
Light Temperature:	2700, 3000, 4000 K
Light Color:	CCT Select
Color Rendering Index:	≥70 Ra
Color Consistency (SDCM):	<5
Beam Angle:	140x70 °
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	0-10V,PWM,"Power Select"
LED-Chip Manufacturer:	Manlux
LED-Chip:	SMD5050
Number of LED:	216
Ignition Time:	<0,5 s
Input Current:	AC 100-277V, 50/60Hz
Power Consumption:	Power Select (30, 45, 60 W)
Contains Driver:	✓
Driver Manufacturer:	Inventronic
Power Factor (PF):	>0.95
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	Kabel offenen Enden 60cm
Switching Cycles:	>100.000
Electrical Protection Class:	I
Ambient Temperature (TA):	-40°C - 50°C
Storage Temperature:	-40°C - 60°C

Dimensions:	450x246x122 mm
Montageart:	surface mounted
IP Class:	66
IK Code:	08
Housing Color	grey
Housing Material:	aluminum
Coating:	lacquered
Special Feature of Housing:	Mastadapter drehbar 90°
Cover:	Lens
Net Weight:	4100 g
Type of Packaging:	box
Content Master Package:	1
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	100.000 h L70/B50
Disposal Obligation:	✓
Customs Tariff Number:	9405409990
Certifications	CE,LM80
Masthülse:	78mm + 60mm Reduzieradapter
polemount:	78mm + 60mm reducer adapter
Power Select:	30, 45, 60W 0-10V PWM dim
CCT Select:	2700/3000/4000K umschaltbar
Zhaga Socket	7-pin., SPD 10KV,

Information and Downloads:

