
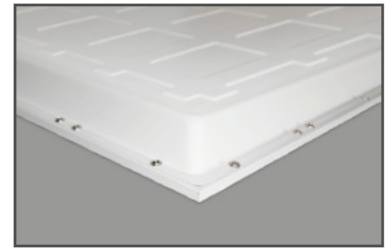


# Lucello Multi-CCT BL-Panel 6262-40-830/850-4800LM BAP UGR 19



## Product information "Lucello Multi-CCT BL-Panel 6262-40-830/850-4800LM BAP UGR 19"

### LED Backlight Panel

Litegear® Lucello LED-Panel for German grid ceilings 62,5 x 62,5cm  
For computer workstations - suitable according to EN 12464-1 for screens with high luminance!

- Very low power consumption and high system efficiency: 120lm/W @CRI90
- Power Select: electronic driver with select able output power: 28, 32, 36, 40W
- CCT Select: select able light colour by switch on the panel backside: 3000, 4000, 5000 Kelvin
- Replacment for traditional troffer lights: 4 x 18W T8 flourescent tubes
- excellent price/performance ratio, fast ROI
- Diffusor made from UV stabilized PS
- wide beam angle and very uniform light distribution

### Applications:

Shops, corridors, production areas, storage rooms, warehouse, dressing rooms, health club, Fitness, meeting rooms, school

## Technical Details:

|                             |                   |
|-----------------------------|-------------------|
| Luminous Flux               | 4800 lm           |
| Light Yield:                | 120 lm/W          |
| Light Temperature:          | 3000,4000, 5000 K |
| Color Rendering Index (CRI) | ≥90 Ra            |
| Color Consistency (SDCM):   | 6                 |
| Power Consumption:          | 28,32,36,40 W     |
| Power Factor (PF):          | 0.9               |
| Operating Hours:            | >50.000 h L80/B10 |
| Switching Cycles:           | >30.000           |
| Ignition Time:              | <0,5 s            |
| Ambient Temperature (TA):   | -20°C - 45°C      |
| Housing Material:           | Stahl+Alu+PS      |
| Housing Color               | white             |
| Coating:                    | powder-coated     |
| Dimensions                  | 620x620x30 mm     |
| Net Weight:                 | 1846 g            |
| Warranty                    | 5 years           |

### Information and Downloads:

