

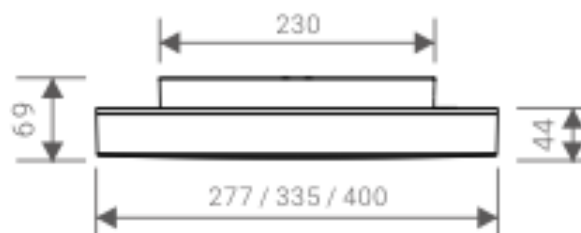


LYONA 400-32/827-840-4000LM CCT-/Power Select DALI D4i Dim



Technical Details:

Luminous Flux:	4000 lm
Light Yield:	125 lm/W
Light Temperature:	2700, 3000, 4000 K
Light Color:	CCT Select
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<3
Beam Angle:	120 °
Unified Glare Rating (UGR):	<22
Light Emission:	downward
Dimmable:	✓
Method of Dimming:	DALI-2
LED-Chip Manufacturer:	Smalite
LED-Chip:	SMD 2835
Ignition Time:	<0,5 s
Input Current:	AC 220 - 240V, 50/60Hz, DC 180-240V
Power Consumption:	Power Select (12, 17, 23, 32 W)
Contains Driver:	✓
Power Factor (PF):	>0.9
Input Driver:	terminal
CC/CV:	CC
Output Current Adjustable:	✓
Input Lamp:	Terminal
Switching Cycles:	>100.000
Electrical Protection Class:	II
Compatible with Emergency Current:	✓
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-25°C - 40°C
Storage Temperature:	-40°C - 40°C

Dimensions:	400x69 mm
Mounting:	ceiling,wall
Montageart:	Aufbau + Einbau
IP Class:	65
IK Code:	10
Housing Color	white
Housing Material:	Polycarbonat
Special Feature of Housing:	modularer Aufbau
Cover:	opal
Net Weight:	1450 g
Type of Packaging:	box
Weight incl. Packaging:	1.88 kg
Content Master Package:	5
Dimensions of Master Package:	430x420x435 mm
Weight Master Package:	9,8 kg
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	100.000 h L80/B50
Disposal Obligation:	✓
Customs Tariff Number:	9405114090
Certifications	CE,SELV
Ideal für Flure und Treppenhäuser	
Perfect for corridors and staircase hous	
Kann im Freien unter Vordächer verwendet werden!	
Can be used temporarily outside under canopies	
3CCT Select: 2700-4000K, Power Select: 12 -32W	

